

Modular Potentiometers with Cermet (P11) or Conductive Plastic Elements (PA11)



FEATURES

- CECC 41300
- GAM T1
- P11 version for industrial and military applications
- PA11 version for professional audio applications
- Trimmer version T11/TA11 (see document No. 51021)
- Miniature module size: 12.5 mm square - low current compatibility
- Five shaft diameters and 12 terminal styles
- Multiple assemblies - up to seven modules
- Shaft and panel sealed version
- Up to twenty-one indent positions
- Switch modules
- Concentric shafts
- Motorized version
- Custom designs


RoHS
COMPLIANT

VERSATILE	MODULAR	COMPACT	ROBUST
-----------	---------	---------	--------


ELECTRICAL SPECIFICATIONS			
		PA11	P11
Resistive Element		Conductive plastic	Cermet
Electrical Travel		270° ± 10°	270° ± 10°
Resistance Range*	Linear Law	1 kΩ to 1 MΩ	10 Ω to 10 MΩ
	Non Linear Law	470 Ω to 500 kΩ	100 Ω to 2.2 MΩ
Tolerance	Standard	± 20 %	± 20 %
	On request	-	± 5 % or ± 10 %
Power Rating	Linear Law	0.5 W at + 70 °C	1 W at + 70 °C
	Non linear Laws	0.25 W at + 70 °C	0.5 W at + 70 °C
	Multiple Assemblies	0.25 W at + 70 °C per module	0.5 W at + 70 °C per module
Temperature Coefficient (Typical)		± 500 ppm/°C	± 100 ppm/°C (R ≥ 100 Ω)
Limiting Element Voltage		350 V	350 V
Contact Resistance Variation	Linear Law	1 %	2 % or 3 Ω
End Resistance (Typical)		2 Ω	2 Ω
Independent Linearity (Typical)	Linear Law	± 5 %	± 5 %
Insulation Resistance		10 ⁶ MΩ min.	10 ⁶ MΩ min.
Dielectric Strength		1500 V _{RMS} min.	1500 V _{RMS} min.
Attenuation		90 dB max. and 0.05 dB min.	-
Mechanical Rotational Life		50 000 cycles	50 000 cycles

* Consult Vishay Sfernice for other ohmic values

MECHANICAL SPECIFICATIONS PA11 AND P11

Mechanical Travel:	300° ± 5°
Operating Torque, Single and Dual Assemblies:	
3 mm, 4 mm (1/8") dia. Shafts	0.5 to 1.3 Ncm max. (0.7 to 1.8 oz-inch max.)
6 mm (1/4") dia. Shafts	0.7 to 1.5 Ncm max. (1 to 2.1 oz-inch max.)
Three to Seven Modules (per module):	0.2 to 0.3 Ncm max. (0.3 to 0.45 oz-inch max.)
End Stop Torque:	
3 mm, 4 mm (1/8") dia. Shafts	25 Ncm max. (2.1 lb-inch max.)
6 mm (1/4") dia. Shafts	80 Ncm max. (6.8 lb-inch max.)
Tightening Torque:	
6 mm, 7 mm (1/4") dia. bushings	150 Ncm max. (13 lb-inch max.)
10 mm (3/8") dia. bushings	250 Ncm max. (21 lb-inch max.)
Weight	7 g to 9 g per module (0.25 to 0.32 oz)

VARIATION LAWS

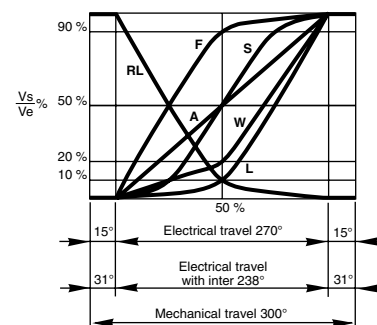




Modular Potentiometers with Cermet (P11) or
Conductive Plastic Elements (PA11)


Vishay Sfernice

DIMENSIONS in millimeters [inches]

PCB PIN OUT A - A₁ - A₂/X - X₁ - X₂/Z - Z₁ - Z₂/W - W₁ - W₂

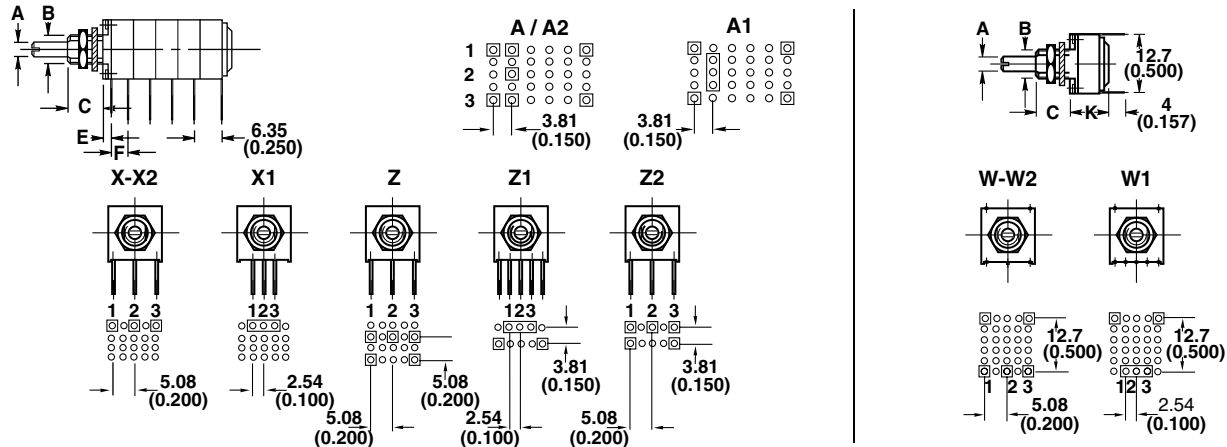


SOLDER LUGS Y

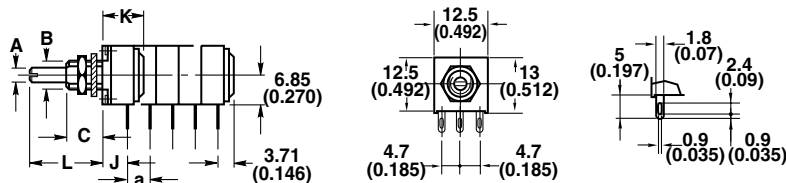


**PANEL AND SHAFT SEALED
TP/QP/VP/2P/7P**


All models have to same
bushing DIA 8 mm - L 8 mm




PANEL CUT OUT

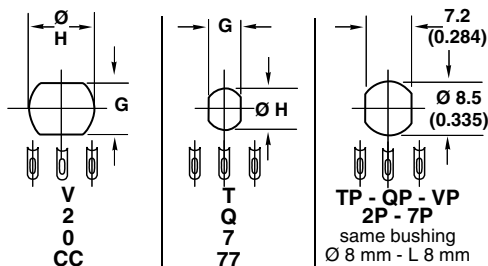


CIRCUIT DIAGRAM




CONCENTRIC SHAFT

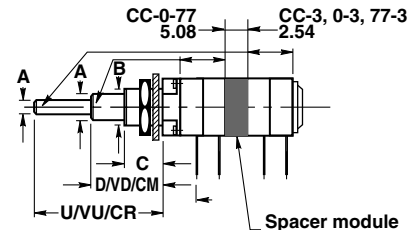

P11/PA11 71
P11/PA11 72
P11/PA11 71H
P11/PA11 72H with spindle baking nut

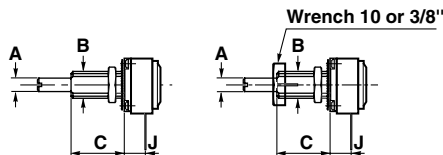

SWITCH: MOMENTARY PUSH OR PUSH-PUSH

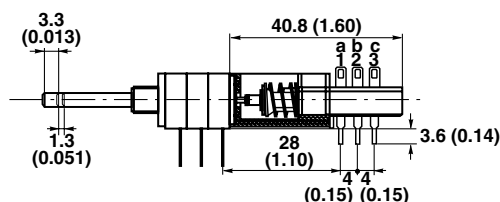

The position of each module is free

Shafts	T	Q	V	CC	7	71	72	2	0	77		
	dimensions mm ± 0.5				dimensions inches ± (0.01)							
A Shafts Ø	3	4	6	3/6	1/8"	1/8"	1/8"	1/4"	1/8"	1/4"	0.07	1/8"
B Bushing Ø	6	7	10	10	1/4"	1/4"	1/4"	3/8"	3/8"		1/4"	
C L	8	8	9.5	9.5	1/4"	3/8"	1/2"	3/8"	3/8"		1/4"	
J version Y, X, X ₁ , X ₂	5	5	7	7	0.200	0.200	0.200	0.278	0.278		0.200	
K	9.1	9.1	11.1	-	0.357	0.357	0.357	0.436	-		-	
E version Z	1.8	1.8	3.8	3.8	0.071	0.071	0.071	0.150	0.150		0.071	
E version	1.6	1.6	3.6	3.6	0.063	0.063	0.063	0.14	0.14		0.063	
F	version Z : 5.08 (0.200)				versions A- A ₁ -A ₂ -Z ₁ -Z ₂ : 3.81 (0.150)							
G Panel	5.2	6.2	8.2	8.2	0.197	0.197	0.197	0.323	.323		0.197	
H Cutout Ø	6.5	7.5	10.5	10.5	0.268	0.268	0.268	0.394	0.394		0.268	
a	variable 5.08 (0.200)				7.62 (0.300)			10.16 (0.400)				
Thread	M 0.75				32 threads/inch							
Nut	8	10	12	12	0.313	0.313	0.313	0.500	0.500		0.313	
Shaft lengths L	Measurement from the mounting face, see ordering procedures											


ENVIRONMENTAL SPECIFICATIONS

	PA11
Operating Temperature Range	- 55 °C + 125 °C
Climatic Category	55/125/21
Sealing	IP64
Storage Temperature	- 55 °C + 125 °C

P11
- 55 °C + 125 °C
55/125/56
IP64
- 55 °C + 150 °C

STANDARD RESISTANCE ELEMENT DATA											
STANDARD RESISTANCE VALUES	P11 CERMET						PA11 CONDUCTIVE PLASTIC LINEAR LAW			TCR	
	LINEAR LAW			NON LINEAR LAW						- 55 °C	+ 125 °C
	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH WIPER	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH WIPER	MAX. POWER AT 70 °C	MAX. WORKING VOLTAGE	MAX. CUR. THROUGH WIPER	P11	PA11
Ω	W	V	mA	W	V	mA	W	V	mA	ppm/°C	
22	1	4.69	213.2							± 200	
47		6.85	145.8								
100		10	100								
200		14.8	67.4	0.5	15.3	32.7					
470		21.6	46.1		22.4	22.4	0.5	22.4	22.4		
1K		31.6	31.6		33.2	15.1		33.2	15.1		
2.2K		46.9	21.3		48.5	10.3		48.5	10.3		
4.7K		63.5	14.5		79.7	7.07		79.7	7.07		
10K		100	10		105	4.77		105	4.77		
22K		148.3	6.7		153	3.26		153	3.26		
47K		216.7	4.6		224	2.24		224	2.24		
100K	1	316.2	3.16	0.5	332	1.51	0.5	332	1.51		
220K	0.56	350	1.59	0.26	350	0.74	0.5	350	0.74		
470K	0.26	350	0.75	0.12	350	0.35	0.26	350	0.74		
1M	0.12	350	0.35								
2.2M	0.05	350	0.16								
4.7M	0.02	350	0.07								

POWER RATING CHART

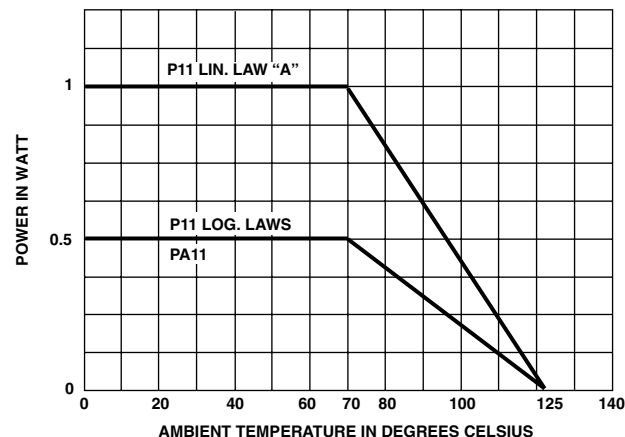

MULTIPLE ASSEMBLIES

Standard assemblies can comprise up to 7 modules in addition to the shaft and bushing module.

Detents module (CV)

Switch modules (RS or RSI)


Potentiometer modules

Spacer module (EV) to increase the distance between rows of pins from 5.06 mm (0.200) to 10.16 mm (0.400).

Screening module, with ground terminal.

The position of each module is free except the push/push, momentary push and motor which has to be the last module.

LINEARITY - CONFORMITY

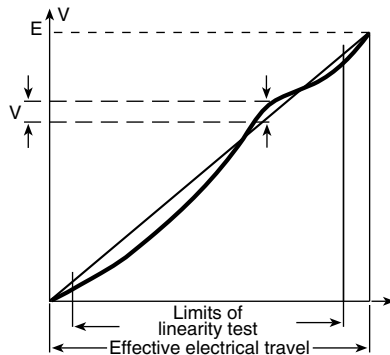

The independent linearity (conformity for the non linear laws) is the maximum gap ΔV between the actual variation curve and the theoretical variation curve the nearest to it. The linearity and the conformity are expressed in percentage of the total applied voltage E


$$\text{linearity conformity} = \frac{\pm \Delta V \text{ max}}{E}$$

They are measured over 90 % of actual electrical travel (centered).

On request linearity can be guaranteed in linear law.

For example: linearity $\pm 2\%$ + J 145 option (see ordering procedure).

INTERLINEARITY - INTERCONFORMITY

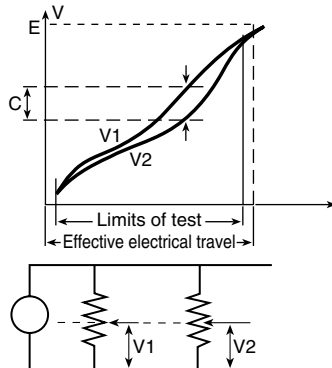

It is the maximum deviation between the actual voltage outputs of 2 or more pot modules in the same assembly. It is expressed as a percentage of the total applied voltage, or preferably in dB attenuation.

Interlinearity is measured between 2 pot modules, over 10 to 90 % of the attenuation.

The interlinearity or interconformity is expressed as a percentage of the total applied voltage :

$$I \% = \frac{|C|}{E}$$

Or in decibels by comparison between outputs V1 and V2

$$I \text{ dB} = 20 \log \frac{V_1}{V_2}$$

PERFORMANCE				
TESTS	CONDITIONS	TYPICAL VALUES AND DRIFTS		
			P11 CERMET	PA11 CONDUCTIVE PLASTIC
Load Life	1000 h at + 70 °C (90'/30')	total resistance shift	$\pm 2\%$	$\pm 10\%$
		contact resistance variation	$\pm 4\%$	$\pm 5\%$
Temperature Cycle	5 cycles - 55 °C to 125 °C	total resistance shift	$\pm 0.2\%$	$\pm 0.5\%$ typical
Moisture	+ 40 °C 93 % relative humidity	total resistance shift insulation resistance	56 days $\pm 2\%$ > 1000 M Ω	21 days $\pm 5\%$ > 10 M Ω
Rotational Life	P11/PA11: 50 000 cycles	total resistance shift contact resistance variation	$\pm 5\%$ $\pm 5\%$	$\pm 6\%$ $\pm 2\%$
Climatic Sequence	Dry heat at + 125 °C/Damp heat Cold - 55 °C/Damp Heat 5 cycles	total resistance shift	$\pm 1\%$	-
Shock	50 G 11 ms 3 shocks - 3 directions	total resistance shift resistance setting change	$\pm 0.2\%$ $\pm 0.5\%$	$\pm 0.2\%$ $\pm 0.5\%$ typical
Vibration	10 - 55 Hz 0.75 mm or 10 G 6 hours	total resistance shift voltage setting change	$\pm 0.2\%$ $\pm 0.5\%$ typical	$\pm 0.2\%$ $\pm 0.5\%$ typical

OPTIONS

MODULES : RS ON/OFF SWITCH RSI CHANGEVER SWITCH

The position of each module is free.

RS and RSI rotary switches are housed in a standard P11 module size 12.7 x 12.7 x 5.08 mm (0.5" x 0.5" x 0.2"). They have the same terminal styles as the assembled electrical modules.

CAUTION: Because of the switch actuation travel, the potentiometer total electrical travel is reduced to $240^\circ \pm 10^\circ$

Switch actuation is described as seen from the shaft end.

D: means actuation in maximum CCW position

F: means actuation in maximum CW position

The switch actuation travel is 25° with a total mechanical travel of $300^\circ \pm 5^\circ$.

MODULES : PUSH/PUSH SWITCH RSPP MOMENTARY/PUSH SWITCH RSMP

The switches are manufactured by ITT, F.U. series (NE18 series available on request).

They have to be the last element of potentiometer and are linked to electrical module by an interface.

RSPP and RSMP switches are available only with P11/PA11 T-Q or 7 series not with P11/PA11 V or 2 series.

Options :

2 reversing switches F2 4 reversing switches F4

6 reversing switches F6 8 reversing switches F8

Available with shafts R (T), G (Q), CR (7) others shafts on request.

Not available with panel sealed option.


Number of modules before the switch limited to 3 modules.

VALLEY DETENTS


The valley detents mechanism is housed in a standard P11 module. Up to 21 detents position available.

Count detents as follows : 1 for CCW position, 1 for full CW position, plus the other positions forming **equal resistance increments** (linear taper) - **not equal angles**.

Available now : CVID - CVIF - CVIM
CV3 - CV11 - CV21

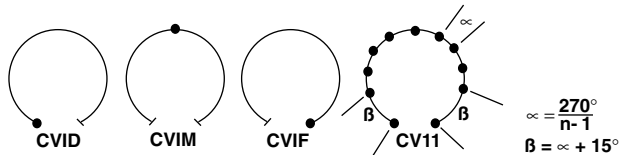

SWITCH MODULES

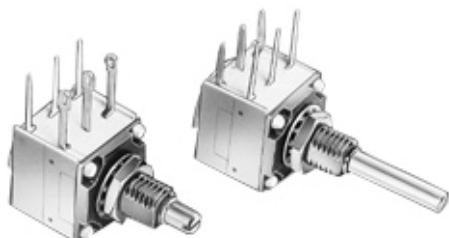

RSD SINGLE POLE SWITCH, NORMALLY OPEN

In full CCW position, the contact between 1 and 3 is open. It is made at the beginning of the travel in CW direction.

RSF SINGLE POLE SWITCH, NORMALLY OPEN

In full CW position, the contact between 1 and 3 is open. It is made at the beginning of the travel in CCW direction.

RSID SINGLE POLE CHANGEVER

In full CCW position, the contact is made between 3 and 2 and open between 3 and 1. Switch actuation (CW direction) reverses these positions.

RSIF SINGLE POLE CHANGEVER

In full CW position, the contact is made between 1 and 2 and open between 1 and 3. Switch actuation (CCW direction) reverses these positions.

RSPP F2 : PUSH/PUSH SWITCH WITH TWO REVERSING SWITCHES

Idle position : the contact is made between 1 and 2 and a and b. It is open between 2 and 3 and b and c.

Pushed position: the contact is made between 2 and 3 and b and c. It is open between 1 and 2 and a and b.


Not available on P11V and P11-2.

On request for P11Q and P11-7.

SWITCH SPECIFICATIONS

MODEL		RS - RSI	F2 to F8
Switching Power max.		62.5 VA $\cup$ 15 VA =	50 VA $\cup$
Switching Current max.		0.25 A 250 V $\cup$ 0.5 A 30 V =	0.5 A $\cup$
Max. Current Through Element		2 A	2 A
Contact Resistance		30 m Ω	100 m Ω
Dielectric Strength	Terminal to Terminal	1000 V _{RMS}	1500 V _{RMS}
	Terminal to Bushing	2000 V _{RMS}	2000 V _{RMS}
Max. Voltage Operation		250 V $\cup$ 30 V =	250 V $\cup$
Insulation Resistance Between Contacts		10 ⁶ M Ω	10 ³ M Ω
Life at P max.		10 000 actuations	100 000 actuations
Minimal Travel		25°	3.3 mm to 4.7 mm
Operating Temperature		- 40 °C to + 85 °C	- 20 °C + 70 °C


ELECTRICAL DIAGRAM

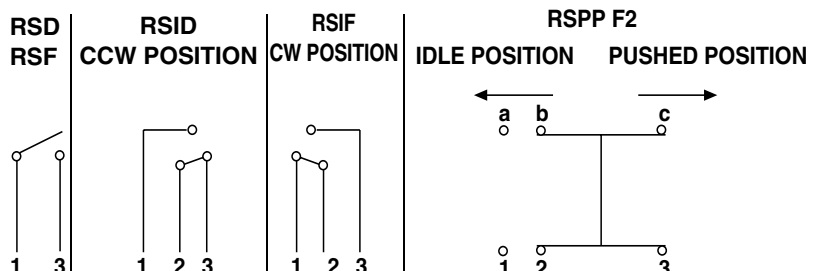

**CENTER TAP "J"**

The extra terminal is a solder lug connected at 50 % of electrical travel and situated in the potentiometer module opposite the terminals.

Center tap short circuit 11° of travel.

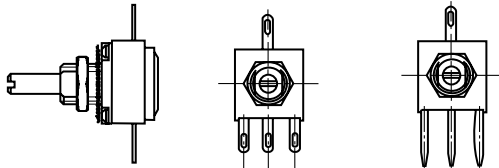**SHAFTS** (see Ordering Information)

The shaft lengths are always measured from the mounting face.

Standard shafts are designed by a letter code (one or two digits). Shafts slots are aligned to $\pm 10^\circ$ of the wiper position.

CONCENTRIC SHAFTS

The CC or 0 or 77 concentric shaft versions allies the total flexibility of the P11/PA11 modular system to the advantage of having two separate shafts.

The outer 6 mm or 1/4" or 1/8" dia. shaft drives the modules situated immediately behind the panel, before the spacer module.

The inner 3 mm or 1/8" or 0.07" dia. shaft drives the modules situated after the spacer module.

Spacer is available with a choice of two spacer thickness :

5.08 mm designations: CC, 0, 77

2.54 mm designations: CC-3, 0-3, and 77-3. See dimensional drawings on second page of this data sheet

CUSTOM SHAFTS

When special shafts are required - flat, threaded ends, special shaft lengths, etc. a drawing is required.

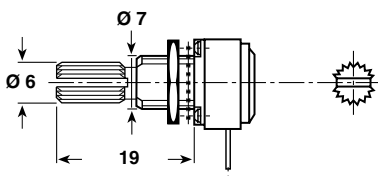
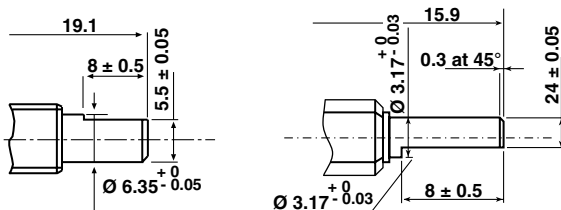
SPLINED SHAFT "I"**FLATTED SHAFT****PA11/P11 - 2 = VHM****PA11/P11 - 7 = CDM**

Fig. 9

NEUTRAL MODULE "EN"


Neutral or screen module is housed in a standard P11 module. It is used as a screen between two electrical modules.

The leads can be connected to ground.

LOCATING PEGS (Anti-rotation lugs)

The locating peg is provided by a plate mounted on the bushing and positioned by the module sides. Four set positions are available, clock face orientation: 12, 3, 6, 9.

All P11 bushings have a double flat. When panel mounting holes have been punched accordingly, an anti-rotation log is not necessary.

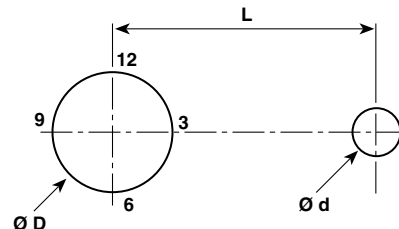

CODE	P11 - PA11					EFFECTIVE HIGH PEG
	VERSION	T-7	V-CC	Q	2-0	
B24	Ø D mm	6.5	10.5	7.5	10	0.7
	Ø d mm	2	2	2	2	
	L mm	6.2	6.2	6.2	6.2	
B30	Ø d mm	2	2	2	2	0.7
	L mm	7.75	7.75	7.75	7.75	
B53	Ø d mm	—	3.5	—	3.5	1.1
	L mm	—	13.5	—	13.5	

TRIMMERS T11

See data sheet document No. 51021

MARKING**POTENTIOMETER MODULE**

VISHAY logo, nominal ohmic value (Ω , $k\Omega$, $M\Omega$), two stars identify PA11 version, tolerance in % - variation law, manufacturing date (four digits), "3" for the lead 3.

SWITCH MODULE

Version, manufacturing date (four digits), "c" for common lead.

INDENT MODULE

Version, manufacturing date (four digits).

P11, PA11

Vishay Sfernice

Modular Potentiometers with Cermet (P11) or Conductive Plastic Elements (PA11)



ORDERING INFORMATION

<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">P11 Cermet element</td> <td style="width: 50%;">PA11 Conductive plastic element</td> </tr> <tr> <td colspan="2" style="text-align: center;">SERIES</td> </tr> </table>	P11 Cermet element	PA11 Conductive plastic element	SERIES		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Y Solder lugs - radial 4.70 mm (.200") pin spacing</td> <td style="width: 50%;">B24 Distance from shaft center of 6.2 mm (.244") for all models. Plate thickness of 0.4 mm (.015").</td> </tr> <tr> <td>X PCB pins - radial</td> <td>B30 Distance from shaft center of 7.75 mm (.305") for all models. Plate thickness of 0.4 mm (.015").</td> </tr> <tr> <td>Z PCB pins - radial with front support plate</td> <td>B53 Distance from shaft center of 13.5 mm (.531") for V, 2, CC and O models. Plate thickness of 0.8 mm (.031").</td> </tr> <tr> <td>A PCB pins - radial with front and back support plates</td> <td rowspan="2">Locating pegs can be placed at 12, 3, 6 or 9 o'clocks. Not available with panel and shaft sealing option P.</td> </tr> <tr> <td>W PCB pins - axial with 2 extra pins - 1 module only</td> </tr> <tr> <td>- 5.08 mm (.200") pin spacing for X, Z, W pins section 0.9 x 0.3 mm² (.035" x .012")</td> <td></td> </tr> </table>	Y Solder lugs - radial 4.70 mm (.200") pin spacing	B24 Distance from shaft center of 6.2 mm (.244") for all models. Plate thickness of 0.4 mm (.015").	X PCB pins - radial	B30 Distance from shaft center of 7.75 mm (.305") for all models. Plate thickness of 0.4 mm (.015").	Z PCB pins - radial with front support plate	B53 Distance from shaft center of 13.5 mm (.531") for V, 2, CC and O models. Plate thickness of 0.8 mm (.031").	A PCB pins - radial with front and back support plates	Locating pegs can be placed at 12, 3, 6 or 9 o'clocks. Not available with panel and shaft sealing option P.	W PCB pins - axial with 2 extra pins - 1 module only	- 5.08 mm (.200") pin spacing for X, Z, W pins section 0.9 x 0.3 mm ² (.035" x .012")		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="6" style="text-align: center;">FROM MOUNTING FACE</td> </tr> <tr> <td>T</td> <td>K</td> <td>Dia.</td> <td>Length</td> <td>End</td> <td>End Shaft</td> </tr> <tr> <td></td> <td>M</td> <td>3</td> <td>9.5</td> <td>Flat</td> <td>slotted</td> </tr> <tr> <td></td> <td>R</td> <td>3</td> <td>12.5</td> <td rowspan="2">}</td> <td rowspan="2"></td> </tr> <tr> <td></td> <td></td> <td>3</td> <td>22</td> </tr> <tr> <td>Q</td> <td>E</td> <td>4</td> <td>9.5</td> <td></td> <td>slotted</td> </tr> <tr> <td></td> <td>F</td> <td>4</td> <td>12.5</td> <td rowspan="2">}</td> <td rowspan="2"></td> </tr> <tr> <td></td> <td>G</td> <td>4</td> <td>22</td> </tr> <tr> <td></td> <td>I</td> <td>6</td> <td>19</td> <td></td> <td>spined</td> </tr> <tr> <td>V</td> <td>D</td> <td>6</td> <td>16</td> <td rowspan="2">}</td> <td rowspan="2">slotted</td> </tr> <tr> <td></td> <td>N</td> <td>6</td> <td>25</td> </tr> <tr> <td></td> <td>S</td> <td>6</td> <td>50</td> <td></td> <td></td> </tr> <tr> <td colspan="6" style="text-align: center;">AP Custom - specify or quote drawing.</td> </tr> <tr> <td>7</td> <td>CDM</td> <td>1/8"</td> <td>5/8"</td> <td rowspan="2">}</td> <td rowspan="2">slotted</td> </tr> <tr> <td></td> <td>CK</td> <td>1/8"</td> <td>3/8"</td> </tr> <tr> <td>7</td> <td>CM</td> <td>1/8"</td> <td>1/2"</td> <td rowspan="4">}</td> <td rowspan="4">slotted</td> </tr> <tr> <td>71</td> <td>CD</td> <td>1/8"</td> <td>5/8"</td> </tr> <tr> <td>72</td> <td>CH</td> <td>1/8"</td> <td>3/4"</td> </tr> <tr> <td></td> <td>CR</td> <td>1/8"</td> <td>7/8"</td> </tr> <tr> <td>2</td> <td>VD</td> <td>1/4"</td> <td>5/8"</td> <td rowspan="4">}</td> <td rowspan="4">slotted</td> </tr> <tr> <td></td> <td>VR</td> <td>1/4"</td> <td>7/8"</td> </tr> <tr> <td></td> <td>VN</td> <td>1/4"</td> <td>1"</td> </tr> <tr> <td></td> <td>VL</td> <td>1/4"</td> <td>1.1/2"</td> </tr> <tr> <td></td> <td>VHM</td> <td>1/4"</td> <td>3/4"</td> <td></td> <td>flat</td> </tr> <tr> <td>CC</td> <td>D</td> <td>6</td> <td>16</td> <td rowspan="2">}</td> <td rowspan="2">plain</td> </tr> <tr> <td>CC-3</td> <td>U</td> <td>3</td> <td>28.5</td> </tr> <tr> <td>77</td> <td>CM</td> <td>1/8"</td> <td>1/2"</td> <td rowspan="2">}</td> <td rowspan="2">plain</td> </tr> <tr> <td>77-3</td> <td>CR</td> <td>0.07"</td> <td>0.874"</td> </tr> <tr> <td>0</td> <td>VD</td> <td>1/4"</td> <td>5/8"</td> <td rowspan="2">}</td> <td rowspan="2">plain</td> </tr> <tr> <td>0-3</td> <td>VU</td> <td>1/8"</td> <td>9/8"</td> </tr> </table>	FROM MOUNTING FACE						T	K	Dia.	Length	End	End Shaft		M	3	9.5	Flat	slotted		R	3	12.5	}				3	22	Q	E	4	9.5		slotted		F	4	12.5	}			G	4	22		I	6	19		spined	V	D	6	16	}	slotted		N	6	25		S	6	50			AP Custom - specify or quote drawing.						7	CDM	1/8"	5/8"	}	slotted		CK	1/8"	3/8"	7	CM	1/8"	1/2"	}	slotted	71	CD	1/8"	5/8"	72	CH	1/8"	3/4"		CR	1/8"	7/8"	2	VD	1/4"	5/8"	}	slotted		VR	1/4"	7/8"		VN	1/4"	1"		VL	1/4"	1.1/2"		VHM	1/4"	3/4"		flat	CC	D	6	16	}	plain	CC-3	U	3	28.5	77	CM	1/8"	1/2"	}	plain	77-3	CR	0.07"	0.874"	0	VD	1/4"	5/8"	}	plain	0-3	VU	1/8"	9/8"	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">SINGLE SHAFT</th> </tr> <tr> <th style="text-align: center;">BUSHING</th> <th style="text-align: center;">SHAFT DIA.</th> </tr> <tr> <th style="text-align: center;">DIA. LENGTH</th> <th></th> </tr> <tr> <td>T 6 8</td> <td>3</td> </tr> <tr> <td>Q 7 8</td> <td>4</td> </tr> <tr> <td>V 10 9.5</td> <td>6</td> </tr> <tr> <td>2 3/8" 3/8"</td> <td>1/4"</td> </tr> <tr> <td>7 1/4" 1/4"</td> <td>1/8"</td> </tr> <tr> <td>71 1/4" 3/8"</td> <td>1/8"</td> </tr> <tr> <td>72 1/4" 1/2"</td> <td>1/8"</td> </tr> <tr> <th colspan="2" style="text-align: center;">CONCENTRIC SHAFT</th> </tr> <tr> <td>CC 10 9.5</td> <td>3 - 6</td> </tr> <tr> <td>O 3/8" 3/8"</td> <td>1/8" - 1/4"</td> </tr> <tr> <td>77 1/4" 1/4"</td> <td>0.07" - 1/8"</td> </tr> <tr> <td colspan="2">*All panel sealing versions have a bushing of 8 mm dia. and 8 mm length</td> </tr> <tr> <th colspan="2" style="text-align: center;">SHAFT AND BUSHING</th> </tr> </table>	SINGLE SHAFT		BUSHING	SHAFT DIA.	DIA. LENGTH		T 6 8	3	Q 7 8	4	V 10 9.5	6	2 3/8" 3/8"	1/4"	7 1/4" 1/4"	1/8"	71 1/4" 3/8"	1/8"	72 1/4" 1/2"	1/8"	CONCENTRIC SHAFT		CC 10 9.5	3 - 6	O 3/8" 3/8"	1/8" - 1/4"	77 1/4" 1/4"	0.07" - 1/8"	*All panel sealing versions have a bushing of 8 mm dia. and 8 mm length		SHAFT AND BUSHING	
P11 Cermet element	PA11 Conductive plastic element																																																																																																																																																																																																											
SERIES																																																																																																																																																																																																												
Y Solder lugs - radial 4.70 mm (.200") pin spacing	B24 Distance from shaft center of 6.2 mm (.244") for all models. Plate thickness of 0.4 mm (.015").																																																																																																																																																																																																											
X PCB pins - radial	B30 Distance from shaft center of 7.75 mm (.305") for all models. Plate thickness of 0.4 mm (.015").																																																																																																																																																																																																											
Z PCB pins - radial with front support plate	B53 Distance from shaft center of 13.5 mm (.531") for V, 2, CC and O models. Plate thickness of 0.8 mm (.031").																																																																																																																																																																																																											
A PCB pins - radial with front and back support plates	Locating pegs can be placed at 12, 3, 6 or 9 o'clocks. Not available with panel and shaft sealing option P.																																																																																																																																																																																																											
W PCB pins - axial with 2 extra pins - 1 module only																																																																																																																																																																																																												
- 5.08 mm (.200") pin spacing for X, Z, W pins section 0.9 x 0.3 mm ² (.035" x .012")																																																																																																																																																																																																												
FROM MOUNTING FACE																																																																																																																																																																																																												
T	K	Dia.	Length	End	End Shaft																																																																																																																																																																																																							
	M	3	9.5	Flat	slotted																																																																																																																																																																																																							
	R	3	12.5	}																																																																																																																																																																																																								
		3	22																																																																																																																																																																																																									
Q	E	4	9.5		slotted																																																																																																																																																																																																							
	F	4	12.5	}																																																																																																																																																																																																								
	G	4	22																																																																																																																																																																																																									
	I	6	19		spined																																																																																																																																																																																																							
V	D	6	16	}	slotted																																																																																																																																																																																																							
	N	6	25																																																																																																																																																																																																									
	S	6	50																																																																																																																																																																																																									
AP Custom - specify or quote drawing.																																																																																																																																																																																																												
7	CDM	1/8"	5/8"	}	slotted																																																																																																																																																																																																							
	CK	1/8"	3/8"																																																																																																																																																																																																									
7	CM	1/8"	1/2"	}	slotted																																																																																																																																																																																																							
71	CD	1/8"	5/8"																																																																																																																																																																																																									
72	CH	1/8"	3/4"																																																																																																																																																																																																									
	CR	1/8"	7/8"																																																																																																																																																																																																									
2	VD	1/4"	5/8"	}	slotted																																																																																																																																																																																																							
	VR	1/4"	7/8"																																																																																																																																																																																																									
	VN	1/4"	1"																																																																																																																																																																																																									
	VL	1/4"	1.1/2"																																																																																																																																																																																																									
	VHM	1/4"	3/4"		flat																																																																																																																																																																																																							
CC	D	6	16	}	plain																																																																																																																																																																																																							
CC-3	U	3	28.5																																																																																																																																																																																																									
77	CM	1/8"	1/2"	}	plain																																																																																																																																																																																																							
77-3	CR	0.07"	0.874"																																																																																																																																																																																																									
0	VD	1/4"	5/8"	}	plain																																																																																																																																																																																																							
0-3	VU	1/8"	9/8"																																																																																																																																																																																																									
SINGLE SHAFT																																																																																																																																																																																																												
BUSHING	SHAFT DIA.																																																																																																																																																																																																											
DIA. LENGTH																																																																																																																																																																																																												
T 6 8	3																																																																																																																																																																																																											
Q 7 8	4																																																																																																																																																																																																											
V 10 9.5	6																																																																																																																																																																																																											
2 3/8" 3/8"	1/4"																																																																																																																																																																																																											
7 1/4" 1/4"	1/8"																																																																																																																																																																																																											
71 1/4" 3/8"	1/8"																																																																																																																																																																																																											
72 1/4" 1/2"	1/8"																																																																																																																																																																																																											
CONCENTRIC SHAFT																																																																																																																																																																																																												
CC 10 9.5	3 - 6																																																																																																																																																																																																											
O 3/8" 3/8"	1/8" - 1/4"																																																																																																																																																																																																											
77 1/4" 1/4"	0.07" - 1/8"																																																																																																																																																																																																											
*All panel sealing versions have a bushing of 8 mm dia. and 8 mm length																																																																																																																																																																																																												
SHAFT AND BUSHING																																																																																																																																																																																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">PA11</td> <td style="width: 50%;">7</td> </tr> <tr> <td colspan="2" style="text-align: center;">X13</td> </tr> </table> </td> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">B24</td> <td style="width: 50%;">P</td> </tr> </table> </td> </tr> </table>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">PA11</td> <td style="width: 50%;">7</td> </tr> <tr> <td colspan="2" style="text-align: center;">X13</td> </tr> </table>	PA11	7	X13		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">B24</td> <td style="width: 50%;">P</td> </tr> </table>	B24	P	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">CR</td> <td style="width: 50%;">CV1M</td> </tr> </table> </td> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">RSD</td> <td style="width: 50%;">100 k 20 % A J84</td> </tr> </table> </td> </tr> </table>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">CR</td> <td style="width: 50%;">CV1M</td> </tr> </table>	CR	CV1M	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">RSD</td> <td style="width: 50%;">100 k 20 % A J84</td> </tr> </table>	RSD	100 k 20 % A J84	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">10 k 20 % A J + J84</td> <td style="width: 50%;">100 k</td> </tr> </table> </td> <td style="width: 50%;"></td> </tr> </table>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">10 k 20 % A J + J84</td> <td style="width: 50%;">100 k</td> </tr> </table>	10 k 20 % A J + J84	100 k																																																																																																																																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">PA11</td> <td style="width: 50%;">7</td> </tr> <tr> <td colspan="2" style="text-align: center;">X13</td> </tr> </table>	PA11	7	X13		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">B24</td> <td style="width: 50%;">P</td> </tr> </table>	B24	P																																																																																																																																																																																																					
PA11	7																																																																																																																																																																																																											
X13																																																																																																																																																																																																												
B24	P																																																																																																																																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">CR</td> <td style="width: 50%;">CV1M</td> </tr> </table>	CR	CV1M	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">RSD</td> <td style="width: 50%;">100 k 20 % A J84</td> </tr> </table>	RSD	100 k 20 % A J84																																																																																																																																																																																																							
CR	CV1M																																																																																																																																																																																																											
RSD	100 k 20 % A J84																																																																																																																																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">10 k 20 % A J + J84</td> <td style="width: 50%;">100 k</td> </tr> </table>	10 k 20 % A J + J84	100 k																																																																																																																																																																																																										
10 k 20 % A J + J84	100 k																																																																																																																																																																																																											
Panel and shaft sealed Concentric shafts Locating peg		THE POSITION OF EACH MODULE IS FREE																																																																																																																																																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">PA11</td> <td style="width: 50%;">7</td> </tr> <tr> <td colspan="2" style="text-align: center;">X13</td> </tr> </table> </td> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">B24</td> <td style="width: 50%;">P</td> </tr> </table> </td> </tr> </table>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">PA11</td> <td style="width: 50%;">7</td> </tr> <tr> <td colspan="2" style="text-align: center;">X13</td> </tr> </table>	PA11	7	X13		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">B24</td> <td style="width: 50%;">P</td> </tr> </table>	B24	P	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">CR</td> <td style="width: 50%;">CV1M</td> </tr> </table> </td> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">RSD</td> <td style="width: 50%;">100 k 20 % A J84</td> </tr> </table> </td> </tr> </table>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">CR</td> <td style="width: 50%;">CV1M</td> </tr> </table>	CR	CV1M	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">RSD</td> <td style="width: 50%;">100 k 20 % A J84</td> </tr> </table>	RSD	100 k 20 % A J84	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">10 k 20 % A J + J84</td> <td style="width: 50%;">100 k</td> </tr> </table> </td> <td style="width: 50%;"></td> </tr> </table>		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">10 k 20 % A J + J84</td> <td style="width: 50%;">100 k</td> </tr> </table>	10 k 20 % A J + J84	100 k																																																																																																																																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">PA11</td> <td style="width: 50%;">7</td> </tr> <tr> <td colspan="2" style="text-align: center;">X13</td> </tr> </table>	PA11	7	X13		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">B24</td> <td style="width: 50%;">P</td> </tr> </table>	B24	P																																																																																																																																																																																																					
PA11	7																																																																																																																																																																																																											
X13																																																																																																																																																																																																												
B24	P																																																																																																																																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">CR</td> <td style="width: 50%;">CV1M</td> </tr> </table>	CR	CV1M	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">RSD</td> <td style="width: 50%;">100 k 20 % A J84</td> </tr> </table>	RSD	100 k 20 % A J84																																																																																																																																																																																																							
CR	CV1M																																																																																																																																																																																																											
RSD	100 k 20 % A J84																																																																																																																																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">10 k 20 % A J + J84</td> <td style="width: 50%;">100 k</td> </tr> </table>	10 k 20 % A J + J84	100 k																																																																																																																																																																																																										
10 k 20 % A J + J84	100 k																																																																																																																																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">OPTION INDENT MODULE</th> </tr> <tr> <td style="width: 50%;">CV1M</td> <td style="width: 50%;">1 indent at half travel</td> </tr> <tr> <td>CV1D</td> <td>1 indent CCW position</td> </tr> <tr> <td>CV1F</td> <td>1 indent CW position</td> </tr> <tr> <td>CV3</td> <td>3 indents inc. CW & CCW</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>CV11</td> <td>11 indents</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>-</td> <td>-</td> </tr> <tr> <td>CV21</td> <td>21 indents etc.</td> </tr> <tr> <td colspan="2">Former CRN version (N-1 equal mechanical angles) available on request.</td> </tr> </table>		OPTION INDENT MODULE		CV1M	1 indent at half travel	CV1D	1 indent CCW position	CV1F	1 indent CW position	CV3	3 indents inc. CW & CCW	-	-	-	-	-	-	CV11	11 indents	-	-	-	-	-	-	CV21	21 indents etc.	Former CRN version (N-1 equal mechanical angles) available on request.		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">OPTION SWITCH MODULE</th> </tr> <tr> <td style="width: 50%;">RSD</td> <td style="width: 50%;">Single pole open switch in CCW position - 2 pins</td> </tr> <tr> <td>RSF</td> <td>Single pole open switch in CW position - 2 pins</td> </tr> <tr> <td>RSID</td> <td>Single pole chargeover switch in CCW position - 3 pins</td> </tr> <tr> <td>RSIF</td> <td>Single pole chargeover switch in CW position - 3 pins</td> </tr> <tr> <td colspan="2">An assembly can comprise 1 or more switch modules. Pin out RS and RSI is the print out as other assembled modules.</td> </tr> </table>		OPTION SWITCH MODULE		RSD	Single pole open switch in CCW position - 2 pins	RSF	Single pole open switch in CW position - 2 pins	RSID	Single pole chargeover switch in CCW position - 3 pins	RSIF	Single pole chargeover switch in CW position - 3 pins	An assembly can comprise 1 or more switch modules. Pin out RS and RSI is the print out as other assembled modules.		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">OHMIC VALUE</th> </tr> <tr> <td colspan="2">Quote clearly multipliers K - M</td> </tr> <tr> <td colspan="2">10 Ω to 10 MΩ A linear law - cermet</td> </tr> <tr> <td colspan="2">100 Ω to 2.2 MΩ L, F, S non linear laws - cermet</td> </tr> <tr> <td colspan="2">Conductive plastic 1 kΩ to 1 MΩ A linear law</td> </tr> <tr> <td colspan="2">470 Ω to 500 kΩ non-linear laws</td> </tr> </table>		OHMIC VALUE		Quote clearly multipliers K - M		10 Ω to 10 MΩ A linear law - cermet		100 Ω to 2.2 MΩ L, F, S non linear laws - cermet		Conductive plastic 1 kΩ to 1 MΩ A linear law		470 Ω to 500 kΩ non-linear laws		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">VARIATION LAW</th> </tr> <tr> <td style="width: 50%;">A</td> <td style="width: 50%;">Linear</td> </tr> <tr> <td>L</td> <td>CW log 10 %</td> </tr> <tr> <td>F</td> <td>CW reverse log</td> </tr> <tr> <td>S</td> <td>Audio S shape symmetrical log</td> </tr> <tr> <td>W</td> <td>CW log 20%</td> </tr> <tr> <td>RL</td> <td>CCW log</td> </tr> </table>		VARIATION LAW		A	Linear	L	CW log 10 %	F	CW reverse log	S	Audio S shape symmetrical log	W	CW log 20%	RL	CCW log	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">TOLERANCE</th> </tr> <tr> <td style="width: 50%;">± 20 %</td> <td style="width: 50%;">Standard</td> </tr> <tr> <td>± 10 %</td> <td>Optional</td> </tr> <tr> <td>± 5 %</td> <td>Optional (cermet only)</td> </tr> </table>		TOLERANCE		± 20 %	Standard	± 10 %	Optional	± 5 %	Optional (cermet only)																																																																																																																									
OPTION INDENT MODULE																																																																																																																																																																																																												
CV1M	1 indent at half travel																																																																																																																																																																																																											
CV1D	1 indent CCW position																																																																																																																																																																																																											
CV1F	1 indent CW position																																																																																																																																																																																																											
CV3	3 indents inc. CW & CCW																																																																																																																																																																																																											
-	-																																																																																																																																																																																																											
-	-																																																																																																																																																																																																											
-	-																																																																																																																																																																																																											
CV11	11 indents																																																																																																																																																																																																											
-	-																																																																																																																																																																																																											
-	-																																																																																																																																																																																																											
-	-																																																																																																																																																																																																											
CV21	21 indents etc.																																																																																																																																																																																																											
Former CRN version (N-1 equal mechanical angles) available on request.																																																																																																																																																																																																												
OPTION SWITCH MODULE																																																																																																																																																																																																												
RSD	Single pole open switch in CCW position - 2 pins																																																																																																																																																																																																											
RSF	Single pole open switch in CW position - 2 pins																																																																																																																																																																																																											
RSID	Single pole chargeover switch in CCW position - 3 pins																																																																																																																																																																																																											
RSIF	Single pole chargeover switch in CW position - 3 pins																																																																																																																																																																																																											
An assembly can comprise 1 or more switch modules. Pin out RS and RSI is the print out as other assembled modules.																																																																																																																																																																																																												
OHMIC VALUE																																																																																																																																																																																																												
Quote clearly multipliers K - M																																																																																																																																																																																																												
10 Ω to 10 MΩ A linear law - cermet																																																																																																																																																																																																												
100 Ω to 2.2 MΩ L, F, S non linear laws - cermet																																																																																																																																																																																																												
Conductive plastic 1 kΩ to 1 MΩ A linear law																																																																																																																																																																																																												
470 Ω to 500 kΩ non-linear laws																																																																																																																																																																																																												
VARIATION LAW																																																																																																																																																																																																												
A	Linear																																																																																																																																																																																																											
L	CW log 10 %																																																																																																																																																																																																											
F	CW reverse log																																																																																																																																																																																																											
S	Audio S shape symmetrical log																																																																																																																																																																																																											
W	CW log 20%																																																																																																																																																																																																											
RL	CCW log																																																																																																																																																																																																											
TOLERANCE																																																																																																																																																																																																												
± 20 %	Standard																																																																																																																																																																																																											
± 10 %	Optional																																																																																																																																																																																																											
± 5 %	Optional (cermet only)																																																																																																																																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">OPTIONS</th> </tr> <tr> <td style="width: 50%;">J</td> <td style="width: 50%;">Center tap</td> </tr> <tr> <td>J41</td> <td>Panel sealed bushing 10 mm dia.</td> </tr> <tr> <td>J44</td> <td>Interlinearity ± 2 % (linear law)</td> </tr> <tr> <td>J84</td> <td>Accuracy of center point of CV1M to ± 2 % (except S law)</td> </tr> <tr> <td>J123</td> <td>Linearity ± 3 % (linear law)</td> </tr> <tr> <td>J145</td> <td>Linearity ± 2 % (linear law)</td> </tr> <tr> <td>J152</td> <td>Marking part number</td> </tr> <tr> <td>EN</td> <td>Empty module with screen</td> </tr> <tr> <td>EV</td> <td>Spacer module without pin</td> </tr> <tr> <td>M</td> <td>Motorized assembly</td> </tr> <tr> <td>RSP</td> <td>Push Push switch</td> </tr> <tr> <td>RSPM</td> <td>Momentary Push switch</td> </tr> <tr> <td>Servo</td> <td>Electrical travel 300°</td> </tr> </table>		OPTIONS		J	Center tap	J41	Panel sealed bushing 10 mm dia.	J44	Interlinearity ± 2 % (linear law)	J84	Accuracy of center point of CV1M to ± 2 % (except S law)	J123	Linearity ± 3 % (linear law)	J145	Linearity ± 2 % (linear law)	J152	Marking part number	EN	Empty module with screen	EV	Spacer module without pin	M	Motorized assembly	RSP	Push Push switch	RSPM	Momentary Push switch	Servo	Electrical travel 300°	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th colspan="2" style="text-align: center;">STANDARDS SHAFT LENGTHS</th> </tr> <tr> <td style="width: 50%;">CC</td> <td style="width: 50%;">D</td> </tr> <tr> <td>CC-3</td> <td>U</td> </tr> <tr> <td>77</td> <td>CM</td> </tr> <tr> <td>77-3</td> <td>CR</td> </tr> <tr> <td>0</td> <td>VD</td> </tr> <tr> <td>0-3</td> <td>VU</td> </tr> </table>		STANDARDS SHAFT LENGTHS		CC	D	CC-3	U	77	CM	77-3	CR	0	VD	0-3	VU																																																																																																																																																															
OPTIONS																																																																																																																																																																																																												
J	Center tap																																																																																																																																																																																																											
J41	Panel sealed bushing 10 mm dia.																																																																																																																																																																																																											
J44	Interlinearity ± 2 % (linear law)																																																																																																																																																																																																											
J84	Accuracy of center point of CV1M to ± 2 % (except S law)																																																																																																																																																																																																											
J123	Linearity ± 3 % (linear law)																																																																																																																																																																																																											
J145	Linearity ± 2 % (linear law)																																																																																																																																																																																																											
J152	Marking part number																																																																																																																																																																																																											
EN	Empty module with screen																																																																																																																																																																																																											
EV	Spacer module without pin																																																																																																																																																																																																											
M	Motorized assembly																																																																																																																																																																																																											
RSP	Push Push switch																																																																																																																																																																																																											
RSPM	Momentary Push switch																																																																																																																																																																																																											
Servo	Electrical travel 300°																																																																																																																																																																																																											
STANDARDS SHAFT LENGTHS																																																																																																																																																																																																												
CC	D																																																																																																																																																																																																											
CC-3	U																																																																																																																																																																																																											
77	CM																																																																																																																																																																																																											
77-3	CR																																																																																																																																																																																																											
0	VD																																																																																																																																																																																																											
0-3	VU																																																																																																																																																																																																											



SAP PART NUMBERING GUIDELINES

P	1	1	S	2	T	0	A	B	S	Y	0	0	4	7	0	M	A
MODEL			STYLE	NB	BUSHING	PEG	SHAFT			LEADS			OHMIC VALUE/TOL/LAW OR SPECIAL				
			OF MODULES														

See the end of this data book for conversion tables



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.