



**Safety contactor, 380 V 400 V: 3 kW, 2 N/O, 3 NC, 24 V DC, DC operation, Screw terminals, With mirror contact (not for microswitches).**



**Part no.** DILMS7-R23(24VDC)  
**Catalog No.** 191721  
**Alternate Catalog No.** XTSE007BE23TD

Similar to illustration

## Delivery program

|                      |  |  |                                                                                                                                                                                                                            |
|----------------------|--|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product range        |  |  | Safety contactors                                                                                                                                                                                                          |
| Application          |  |  | Contactors for Motors                                                                                                                                                                                                      |
| Subrange             |  |  | Complete devices up to 170 A                                                                                                                                                                                               |
| Utilization category |  |  | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>NAC-3: Normal AC induction motors: starting, switch off during running<br>AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
| Connection technique |  |  | Screw terminals                                                                                                                                                                                                            |
|                      |  |  |                                                                                                                                                                                                                            |
| Notes                |  |  | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging.                                                                                                    |
| Description          |  |  | With two electronically compatible microswitches 1 S + 1 Ò<br>Auxiliary contact element connected non-detachably with basic device (manual activation not possible).                                                       |

## Rated operational current

|                                                           |                                  |   |    |
|-----------------------------------------------------------|----------------------------------|---|----|
| AC-3                                                      |                                  |   |    |
| 380 V 400 V                                               | I <sub>e</sub>                   | A | 7  |
| AC-1                                                      |                                  |   |    |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                                  |   |    |
| Open                                                      |                                  |   |    |
| at 40 °C                                                  | I <sub>th</sub> = I <sub>e</sub> | A | 22 |
| enclosed                                                  | I <sub>th</sub>                  | A | 18 |
| Conventional free air thermal current, 1 pole             |                                  |   |    |
| open                                                      | I <sub>th</sub>                  | A | 50 |
| enclosed                                                  | I <sub>th</sub>                  | A | 45 |

## Max. rating for three-phase motors, 50 - 60 Hz

|             |   |    |     |
|-------------|---|----|-----|
| AC-3        |   |    |     |
| 220 V 230 V | P | kW | 2.2 |
| 380 V 400 V | P | kW | 3   |
| 660 V 690 V | P | kW | 3.5 |
| AC-4        |   |    |     |
| 220 V 230 V | P | kW | 1   |
| 380 V 400 V | P | kW | 2.2 |
| 660 V 690 V | P | kW | 2.9 |

## Contacts

|                       |  |  |       |
|-----------------------|--|--|-------|
| N/O = Normally open   |  |  | 2 N/O |
| N/C = Normally closed |  |  | 3 NC  |

## Instructions

|                   |  |  |                                                                                                                   |
|-------------------|--|--|-------------------------------------------------------------------------------------------------------------------|
|                   |  |  | Contacts to EN 50 012.<br>Integrated varistor suppressor circuit.<br>With mirror contact (not for microswitches). |
| Contact sequence  |  |  |                                                                                                                   |
| Actuating voltage |  |  | 24 V DC                                                                                                           |
| Voltage AC/DC     |  |  | DC operation                                                                                                      |

## Technical data

### General

|                                                                       |              |                 |                                                                                    |
|-----------------------------------------------------------------------|--------------|-----------------|------------------------------------------------------------------------------------|
| Standards                                                             |              |                 | IEC/EN 60947, VDE 0660, UL, CSA                                                    |
| Lifespan, mechanical                                                  |              |                 |                                                                                    |
| DC operated                                                           | Operations   | $\times 10^6$   | 10                                                                                 |
| Operating frequency, mechanical                                       |              |                 |                                                                                    |
| DC operated                                                           | Operations/h |                 | 9000                                                                               |
| Climatic proofing                                                     |              |                 | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30     |
| Ambient temperature                                                   |              |                 |                                                                                    |
| Open                                                                  |              | °C              | -25 - +60                                                                          |
| Enclosed                                                              |              | °C              | - 25 - 40                                                                          |
| Storage                                                               |              | °C              | - 40 - 80                                                                          |
| Mounting position                                                     |              |                 |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |              |                 |                                                                                    |
| Half-sinusoidal shock, 10 ms                                          |              |                 |                                                                                    |
| Main contacts                                                         |              |                 |                                                                                    |
| N/O contact                                                           |              | g               | 10                                                                                 |
| Auxiliary contacts                                                    |              |                 |                                                                                    |
| N/O contact                                                           |              | g               | 7                                                                                  |
| N/C contact                                                           |              | g               | 5                                                                                  |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted |              |                 |                                                                                    |
| Half-sinusoidal shock, 10 ms                                          |              |                 |                                                                                    |
| Main contacts                                                         |              |                 |                                                                                    |
| N/O contact                                                           |              | g               | 5.7                                                                                |
| Auxiliary contacts                                                    |              |                 |                                                                                    |
| N/O contact                                                           |              | g               | 3.4                                                                                |
| N/C contact                                                           |              | g               | 3.4                                                                                |
| Degree of Protection                                                  |              |                 | IP20                                                                               |
| Protection against direct contact when actuated from front (EN 50274) |              |                 | Finger and back-of-hand proof                                                      |
| Altitude                                                              |              | m               | Max. 2000                                                                          |
| Weight                                                                |              |                 |                                                                                    |
| DC operated                                                           |              | kg              | 0.3                                                                                |
| Screw connector terminals                                             |              |                 |                                                                                    |
| Terminal capacity main cable                                          |              |                 |                                                                                    |
| Solid                                                                 |              | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)                                                 |
| Flexible with ferrule                                                 |              | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)                                               |
| Solid or stranded                                                     |              | AWG             | single 18 - 10, double 18 - 14                                                     |
| Stripping length                                                      |              | mm              | 10                                                                                 |
| Terminal screw                                                        |              |                 | M3.5                                                                               |
| Tightening torque                                                     |              | Nm              | 1.2                                                                                |
| Tool                                                                  |              |                 |                                                                                    |
| Pozidriv screwdriver                                                  |              | Size            | 2                                                                                  |
| Standard screwdriver                                                  |              | mm              | 0.8 x 5.5<br>1 x 6                                                                 |
| Terminal capacity control circuit cables                              |              |                 |                                                                                    |
| Solid                                                                 |              | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)                                               |
| Flexible with ferrule                                                 |              | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)                                               |
| Solid or stranded                                                     |              | AWG             | 18 - 14                                                                            |

|                      |  |      |                    |
|----------------------|--|------|--------------------|
| Stripping length     |  | mm   | 10                 |
| Terminal screw       |  |      | M3.5               |
| Tightening torque    |  | Nm   | 1.2                |
| Tool                 |  |      |                    |
| Pozidriv screwdriver |  | Size | 2                  |
| Standard screwdriver |  | mm   | 0.8 x 5.5<br>1 x 6 |

## Main conducting paths

|                                        |             |      |       |
|----------------------------------------|-------------|------|-------|
| Rated impulse withstand voltage        | $U_{imp}$   | V AC | 8000  |
| Overvoltage category/pollution degree  |             |      | III/3 |
| Rated insulation voltage               | $U_i$       | V AC | 690   |
| Rated operational voltage              | $U_e$       | V AC | 690   |
| Safe isolation to EN 61140             |             |      |       |
| between coil and contacts              |             | V AC | 400   |
| between the contacts                   |             | V AC | 400   |
| Making capacity (p.f. to IEC/EN 60947) |             |      |       |
|                                        | Up to 690 V | A    | 112   |
| Breaking capacity                      |             |      |       |
| 220 V 230 V                            |             | A    | 70    |
| 380 V 400 V                            |             | A    | 70    |
| 500 V                                  |             | A    | 50    |
| 660 V 690 V                            |             | A    | 40    |
| Short-circuit rating                   |             |      |       |
| Short-circuit protection maximum fuse  |             |      |       |
| Type "2" coordination                  |             |      |       |
| 400 V                                  | gG/gL 500 V | A    | 20    |
| 690 V                                  | gG/gL 690 V | A    | 16    |
| Type "1" coordination                  |             |      |       |
| 400 V                                  | gG/gL 500 V | A    | 35    |
| 690 V                                  | gG/gL 690 V | A    | 20    |

## AC

|                                                           |                |   |                                                    |
|-----------------------------------------------------------|----------------|---|----------------------------------------------------|
| AC-1                                                      |                |   |                                                    |
| Rated operational current                                 |                |   |                                                    |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |                                                    |
| Open                                                      |                |   |                                                    |
| at 40 °C                                                  | $I_{th} = I_e$ | A | 22                                                 |
| at 50 °C                                                  | $I_{th} = I_e$ | A | 21                                                 |
| at 55 °C                                                  | $I_{th} = I_e$ | A | 21                                                 |
| at 60 °C                                                  | $I_{th} = I_e$ | A | 20                                                 |
| enclosed                                                  | $I_{th}$       | A | 18                                                 |
| Conventional free air thermal current, 1 pole             |                |   |                                                    |
| open                                                      | $I_{th}$       | A | 50                                                 |
| enclosed                                                  | $I_{th}$       | A | 45                                                 |
| AC-3                                                      |                |   |                                                    |
| Rated operational current                                 |                |   |                                                    |
| Open, 3-pole: 50 – 60 Hz                                  |                |   |                                                    |
| Notes                                                     |                |   | At maximum permissible ambient temperature (open.) |
| 220 V 230 V                                               | $I_e$          | A | 7                                                  |
| 240 V                                                     | $I_e$          | A | 7                                                  |
| 380 V 400 V                                               | $I_e$          | A | 7                                                  |
| 415 V                                                     | $I_e$          | A | 7                                                  |
| 440V                                                      | $I_e$          | A | 7                                                  |
| 500 V                                                     | $I_e$          | A | 5                                                  |
| 660 V 690 V                                               | $I_e$          | A | 4                                                  |
| 380 V 400 V                                               | $I_e$          | A | 7                                                  |

|                          |                |     |     |
|--------------------------|----------------|-----|-----|
| Motor rating             | P              | kWh |     |
| 220 V 230 V              | P              | kW  | 2.2 |
| 240V                     | P              | kW  | 2.2 |
| 380 V 400 V              | P              | kW  | 3   |
| 415 V                    | P              | kW  | 4   |
| 440 V                    | P              | kW  | 4.5 |
| 500 V                    | P              | kW  | 3.5 |
| 660 V 690 V              | P              | kW  | 3.5 |
| AC-4                     |                |     |     |
| Open, 3-pole: 50 – 60 Hz |                |     |     |
| 220 V 230 V              | I <sub>e</sub> | A   | 5   |
| 240 V                    | I <sub>e</sub> | A   | 5   |
| 380 V 400 V              | I <sub>e</sub> | A   | 5   |
| 415 V                    | I <sub>e</sub> | A   | 5   |
| 440 V                    | I <sub>e</sub> | A   | 5   |
| 500 V                    | I <sub>e</sub> | A   | 4.5 |
| 660 V 690 V              | I <sub>e</sub> | A   | 4   |
| Motor rating             | P              | kWh |     |
| 220 V 230 V              | P              | kW  | 1   |
| 240 V                    | P              | kW  | 1.5 |
| 380 V 400 V              | P              | kW  | 2.2 |
| 415 V                    | P              | kW  | 2.3 |
| 440 V                    | P              | kW  | 2.4 |
| 500 V                    | P              | kW  | 2.5 |
| 660 V 690 V              | P              | kW  | 2.9 |

## DC

|                                 |                |   |    |
|---------------------------------|----------------|---|----|
| Rated operational current, open |                |   |    |
| DC-1                            |                |   |    |
| 60 V                            | I <sub>e</sub> | A | 20 |
| 110 V                           | I <sub>e</sub> | A | 20 |
| 220 V                           | I <sub>e</sub> | A | 15 |

## Current heat loss

|                                                   |  |    |     |
|---------------------------------------------------|--|----|-----|
| 3 pole, at I <sub>th</sub> (60°)                  |  | W  | 4.5 |
| Current heat loss at I <sub>e</sub> to AC-3/400 V |  | W  | 0.3 |
| Impedance per pole                                |  | mΩ | 4.6 |

## Magnet systems

|                                                                        |          |                  |                                                                           |
|------------------------------------------------------------------------|----------|------------------|---------------------------------------------------------------------------|
| Voltage tolerance                                                      |          |                  |                                                                           |
| DC operated                                                            | Pick-up  | x U <sub>c</sub> | 0.8 - 1.1                                                                 |
| Notes                                                                  |          |                  | 0.85 - 1.1 only with auxiliary contact module with 3 or more N/C contacts |
| DC operated                                                            | Drop-out | x U <sub>c</sub> | 0.15 - 0.6                                                                |
| Notes                                                                  |          |                  | at least smoothed two-phase bridge rectifier or three-phase rectifier     |
| Power consumption of the coil in a cold state and 1.0 x U <sub>S</sub> |          |                  |                                                                           |
| DC operated                                                            | Pick-up  | W                | 3                                                                         |
| DC operated                                                            | Sealing  | W                | 3                                                                         |
| Duty factor                                                            |          | % DF             | 100                                                                       |
| Changeover time at 100 % U <sub>S</sub> (recommended value)            |          |                  |                                                                           |
| Main contacts                                                          |          |                  |                                                                           |
| DC operated                                                            |          | ms               |                                                                           |
| Closing delay                                                          |          | ms               |                                                                           |
| Closing delay                                                          |          | ms               | 31                                                                        |
| Opening delay                                                          |          | ms               |                                                                           |
| Opening delay                                                          |          | ms               | 12                                                                        |
| Arcing time                                                            |          | ms               | 10                                                                        |

## Electromagnetic compatibility (EMC)

|                      |  |  |                         |
|----------------------|--|--|-------------------------|
| Emitted interference |  |  | according to EN 60947-1 |
|----------------------|--|--|-------------------------|

|                                                           |  |      |                         |
|-----------------------------------------------------------|--|------|-------------------------|
| Interference immunity                                     |  |      | according to EN 60947-1 |
| <b>Rating data for approved types</b>                     |  |      |                         |
| Switching capacity                                        |  |      |                         |
| Maximum motor rating                                      |  |      |                         |
| Three-phase                                               |  |      |                         |
| 200 V<br>208 V                                            |  | HP   | 1.5                     |
| 230 V<br>240 V                                            |  | HP   | 2                       |
| 460 V<br>480 V                                            |  | HP   | 3                       |
| 575 V<br>600 V                                            |  | HP   | 5                       |
| Single-phase                                              |  |      |                         |
| 115 V<br>120 V                                            |  | HP   | 0.25                    |
| 230 V<br>240 V                                            |  | HP   | 1                       |
| General use                                               |  | A    | 20                      |
| Auxiliary contacts                                        |  |      |                         |
| Pilot Duty                                                |  |      |                         |
| AC operated                                               |  |      | A600                    |
| DC operated                                               |  |      | P300                    |
| General Use                                               |  |      |                         |
| AC                                                        |  | V    | 600                     |
| AC                                                        |  | A    | 10                      |
| DC                                                        |  | V    | 250                     |
| DC                                                        |  | A    | 1                       |
| Short Circuit Current Rating                              |  | SCCR |                         |
| Basic Rating                                              |  |      |                         |
| SCCR                                                      |  | kA   | 5                       |
| max. Fuse                                                 |  | A    | 45                      |
| max. CB                                                   |  | A    | 60                      |
| 480 V High Fault                                          |  |      |                         |
| SCCR (fuse)                                               |  | kA   | 30/100                  |
| max. Fuse                                                 |  | A    | 25 Class RK5/20 Class J |
| SCCR (CB)                                                 |  | kA   | 65                      |
| max. CB                                                   |  | A    | 16                      |
| 600 V High Fault                                          |  |      |                         |
| SCCR (fuse)                                               |  | kA   | 30/100                  |
| max. Fuse                                                 |  | A    | 25 Class RK5/20 Class J |
| Special Purpose Ratings                                   |  |      |                         |
| Electrical Discharge Lamps (Ballast)                      |  |      |                         |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        |  | A    | 12                      |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        |  | A    | 12                      |
| Incandescent Lamps (Tungsten)                             |  |      |                         |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        |  | A    | 14                      |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        |  | A    | 14                      |
| Resistance Air Heating                                    |  |      |                         |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        |  | A    | 12                      |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        |  | A    | 12                      |
| Refrigeration Control (CSA only)                          |  |      |                         |
| LRA 480V 60Hz 3phase                                      |  | A    | 60                      |
| FLA 480V 60Hz 3phase                                      |  | A    | 10                      |
| LRA 600V 60Hz 3phase                                      |  | A    | 60                      |
| FLA 600V 60Hz 3phase                                      |  | A    | 10                      |
| Definite Purpose Ratings (100,000 cycles acc. to UL 1995) |  |      |                         |
| LRA 480V 60Hz 3phase                                      |  | A    | 42                      |

|                      |    |      |
|----------------------|----|------|
| FLA 480V 60Hz 3phase | A  | 7    |
| Elevator Control     |    |      |
| 200V 60Hz 3phase     | HP | 0.75 |
| 200V 60Hz 3phase     | A  | 3.7  |
| 240V 60Hz 3phase     | HP | 1.5  |
| 240V 60Hz 3phase     | A  | 6    |
| 480V 60Hz 3phase     | HP | 2    |
| 480V 60Hz 3phase     | A  | 3.4  |
| 600V 60Hz 3phase     | HP | 3    |
| 600V 60Hz 3phase     | A  | 3.9  |

## Design verification as per IEC/EN 61439

|                                                                                                                        |                   |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|-------------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Technical data for design verification                                                                                 |                   |    |                                                                                                                                  |
| Rated operational current for specified heat dissipation                                                               | I <sub>n</sub>    | A  | 7                                                                                                                                |
| Heat dissipation per pole, current-dependent                                                                           | P <sub>vid</sub>  | W  | 0.1                                                                                                                              |
| Equipment heat dissipation, current-dependent                                                                          | P <sub>vid</sub>  | W  | 0                                                                                                                                |
| Static heat dissipation, non-current-dependent                                                                         | P <sub>vs</sub>   | W  | 3                                                                                                                                |
| Heat dissipation capacity                                                                                              | P <sub>diss</sub> | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |                   | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |                   | °C | 60                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |                   |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |                   |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |                   |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |                   |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |                   |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |                   |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|                                                                                                                                                                                       |   |         |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|---------|--|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)                                                                                               |   |         |  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |   |         |  |
| Rated control supply voltage Us at AC 50HZ                                                                                                                                            | V | 0 - 0   |  |
| Rated control supply voltage Us at AC 60HZ                                                                                                                                            | V | 0 - 0   |  |
| Rated control supply voltage Us at DC                                                                                                                                                 | V | 24 - 24 |  |
| Voltage type for actuating                                                                                                                                                            |   | DC      |  |

|                                                         |    |                  |
|---------------------------------------------------------|----|------------------|
| Rated operation current Ie at AC-1, 400 V               | A  | 22               |
| Rated operation current Ie at AC-3, 400 V               | A  | 7                |
| Rated operation power at AC-3, 400 V                    | kW | 3                |
| Rated operation current Ie at AC-4, 400 V               | A  | 5                |
| Rated operation power at AC-4, 400 V                    | kW | 2.2              |
| Rated operation power NEMA                              | kW | 2.2              |
| Modular version                                         |    | No               |
| Number of auxiliary contacts as normally open contact   |    | 2                |
| Number of auxiliary contacts as normally closed contact |    | 3                |
| Type of electrical connection of main circuit           |    | Screw connection |
| Number of normally closed contacts as main contact      |    | 0                |
| Number of main contacts as normally open contact        |    | 3                |

## Approvals

|                                      |  |                                                                          |
|--------------------------------------|--|--------------------------------------------------------------------------|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  | E29096                                                                   |
| UL Category Control No.              |  | NLDX                                                                     |
| CSA File No.                         |  | 012528                                                                   |
| CSA Class No.                        |  | 2411-03, 3211-04                                                         |
| North America Certification          |  | UL listed, CSA certified                                                 |
| Specially designed for North America |  | No                                                                       |



- 1: Overload relay
- 2: Suppressor



Normal AC induction motor  
 Operating characteristics  
 Switch on: from stop  
 Switch off: during run  
 Electrical characteristics:  
 Switch on: up to 6 x Rated motor current  
 Switch off: up to 1 x Rated motor current  
 Utility category




Extreme switching duty  
 Normal AC induction motor  
 Operating characteristics  
 Inching, plugging, reversing  
 Electrical characteristics:  
 Switch on: up to 6 x Rated motor current  
 Switch off: up to 6 x Rated motor current  
 Utilization





## Dimensions

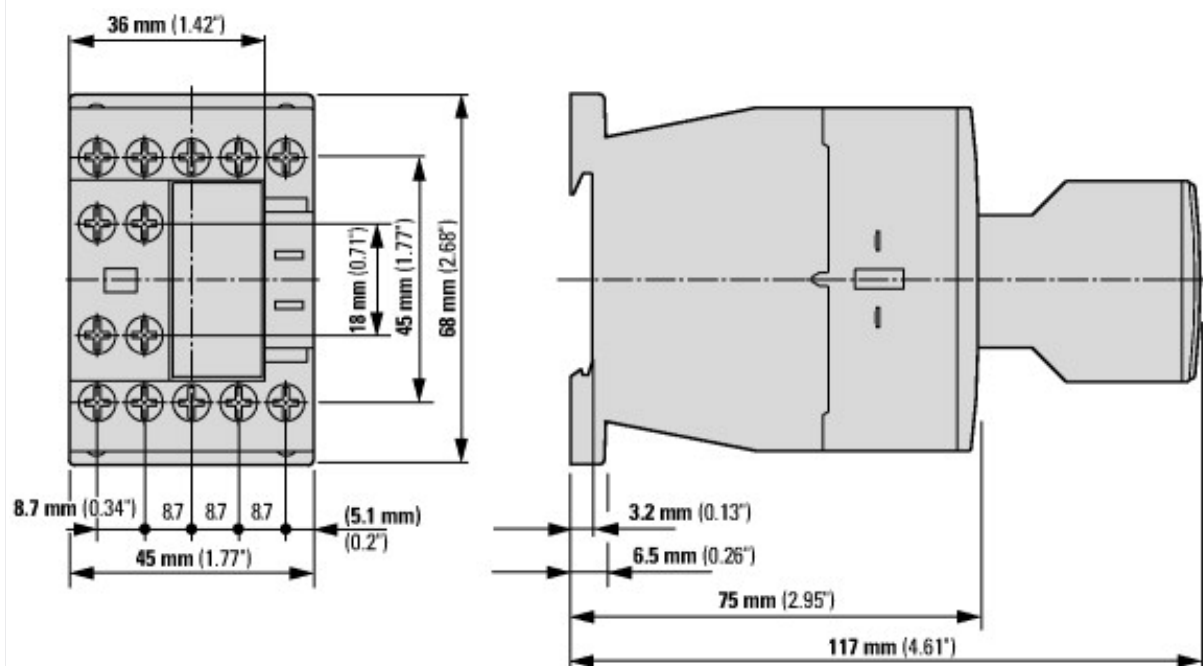

Contactor with auxiliary contact module

