

Rittal – The System.

Faster – better – everywhere.

Punched section with mounting flange, 14 x 39 mm for tubular door frame VX, TS, SE, AX – VX 8619.740

Date : Jun 18, 2019

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



Punched section with mounting flange, 14 x 39 mm for tubular door frame VX, TS, SE, AX – VX 8619.740

created: 18.06.2019 on www.rittal.com/com-en

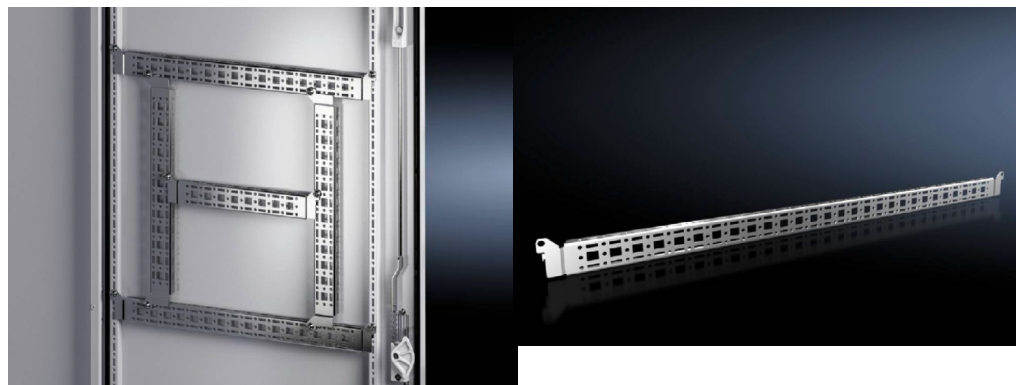

Product description

| | |
|-------------------------|---|
| Description: | For attaching cable ducts, cable conduit holders, equipment installed on the door, etc. |
| Material: | Sheet steel |
| Surface finish: | Zinc-plated |
| Supply includes: | Assembly parts |
| Note: | For installing your own components on the punched section with mounting flange, metal screws or self-tapping M5 screws are required |

Product features

| | |
|------------------------------|---|
| To fit: | Enclosure type: VX Enclosure type: TS Enclosure type: SE Enclosure type: AX Enclosure type: AX with locking rod |
| Installation options: | On the tubular door frame On identical punched sections with mounting flanges |
| To fit door width: | 900 mm |
| Packs of: | 4 pc(s). |
| Weight/pack: | 1.8 kg |

| | |
|--------------------------------------|---|
| Copper weight (kg per piece): | 0 |
| EAN: | 4028177924673 |
| Customs tariff number: | 73269098 |
| ETIM 6.0: | EC002625 |
| ETIM 5.0: | EC002625 |
| eCl@ss 8.0/8.1: | 27189234 |
| eCl@ss 7.0/7.1: | 27189234 |
| eCl@ss 6.0/6.1: | 23159101 |
| eCl@ss 5.1/5.1.4: | 27189250 |
| Product description: | VX Punched section, with mounting flange 14 x 39 mm, for door width: 900 mm |