


T530, Tantalum, Polymer Tantalum, Multi-Anode, 470 uF, 20%, 4 VDC, SMD, Polymer, Molded, Multiple Anodes, Low ESR, 10 mOhms, 7343, Height Max = 3.1mm

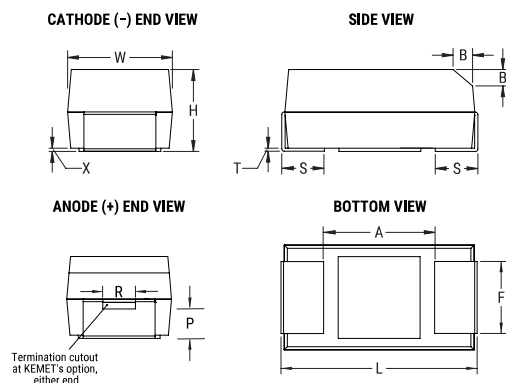

Dimensions

| Footprint | 7343 |
|-----------|-----------------|
| L | 7.3mm +/-0.3mm |
| W | 4.3mm +/-0.3mm |
| H | 2.8mm +/-0.3mm |
| T | 0.13mm REF |
| S | 1.3mm +/-0.3mm |
| F | 2.4mm +/-0.1mm |
| A | 3.6mm MIN |
| B | 0.5mm +/-0.15mm |
| P | 0.9mm REF |
| R | 1mm REF |
| X | 0.1mm +/-0.1mm |

Packaging Specifications

| | |
|---------------------|------------|
| Weight: | 307.51 mg |
| Packaging: | T&R, 178mm |
| Packaging Quantity: | 500 |

General Information

| | |
|--------------|--|
| Supplier: | KEMET |
| Series: | T530 |
| Dielectric: | Polymer Tantalum |
| Style: | SMD Chip |
| Description: | SMD, Polymer, Molded, Multiple Anodes, Low ESR |
| Features: | Low ESR |
| RoHS: | Yes |
| Termination: | Tin |
| Shelf Life: | 52 Weeks |
| MSL: | 3 |

Specifications

| | |
|------------------------|---|
| Capacitance: | 470 uF |
| Capacitance Tolerance: | 20% |
| Voltage DC: | 4 VDC (105C), 2.68 VDC (125C) |
| Temperature Range: | -55/+125C |
| Rated Temperature: | 105°C |
| Humidity: | 60C, 90% RH, 1000 Hours, No Load |
| Dissipation Factor: | 8.00% 120Hz 25C |
| Failure Rate: | N/A |
| Resistance: | 10 mOhms (100kHz 25C) |
| Ripple Current: | 5000 mA (100kHz 45C), 3500 mA (85C), 1250 mA (125C) |
| Leakage Current: | 188 uA (5min 25C) |