
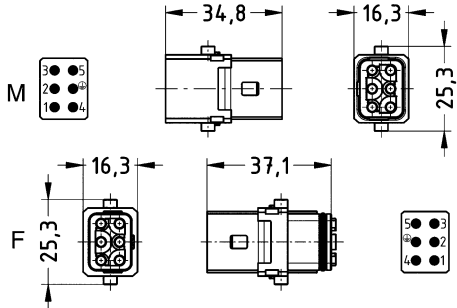

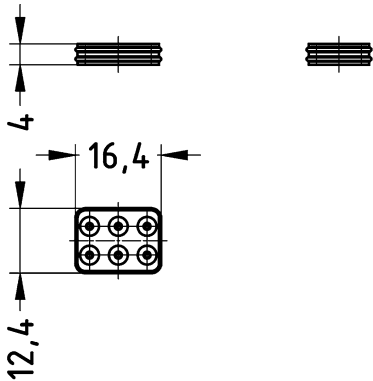


Identification	Conductor cross-section (mm²)	Part number		Drawing (dimensions in mm)
		Male	Female	
<div><div>Han® 1 A , Crimp termination, Single locking lever</div><div></div><div>Please order crimp contacts separately. Order separately the single wire seal or the hoods/housings for an IP65 performance. Please order locking lever separately.</div></div>	0,14 ... 2,5	09 10 005 3005	09 10 005 3105	<div></div>
<div><div>Single wire seal, Silicone, for 6 contacts</div><div></div></div>		09 10 006 9900	09 10 006 9900	<div></div>

Han
1 A

Han
22
·
21