



INDUSTRIAL SERIES

Paper cone
Corrugated suspension
Shallow chassis
High temperature voice coil

Cône papier
Suspension corruguée
Profondeur réduite
Bobine haute température

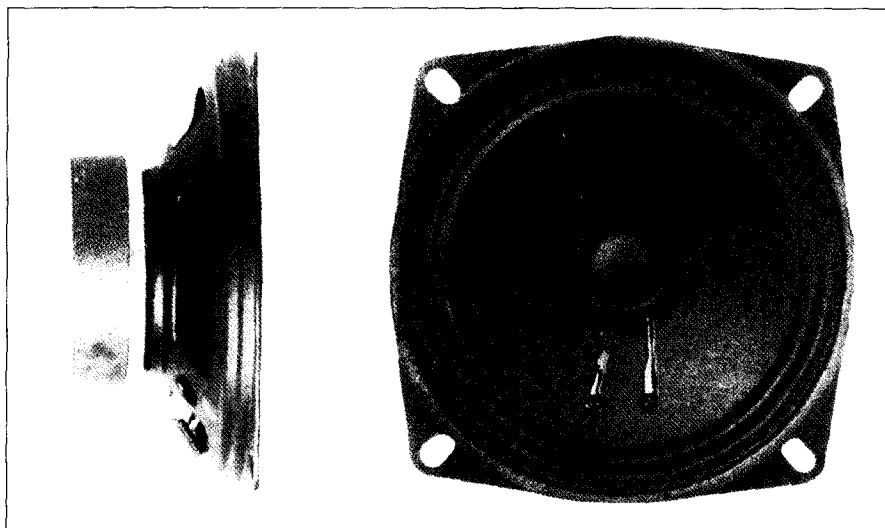

RESPONSE CURVE
refer to page 16

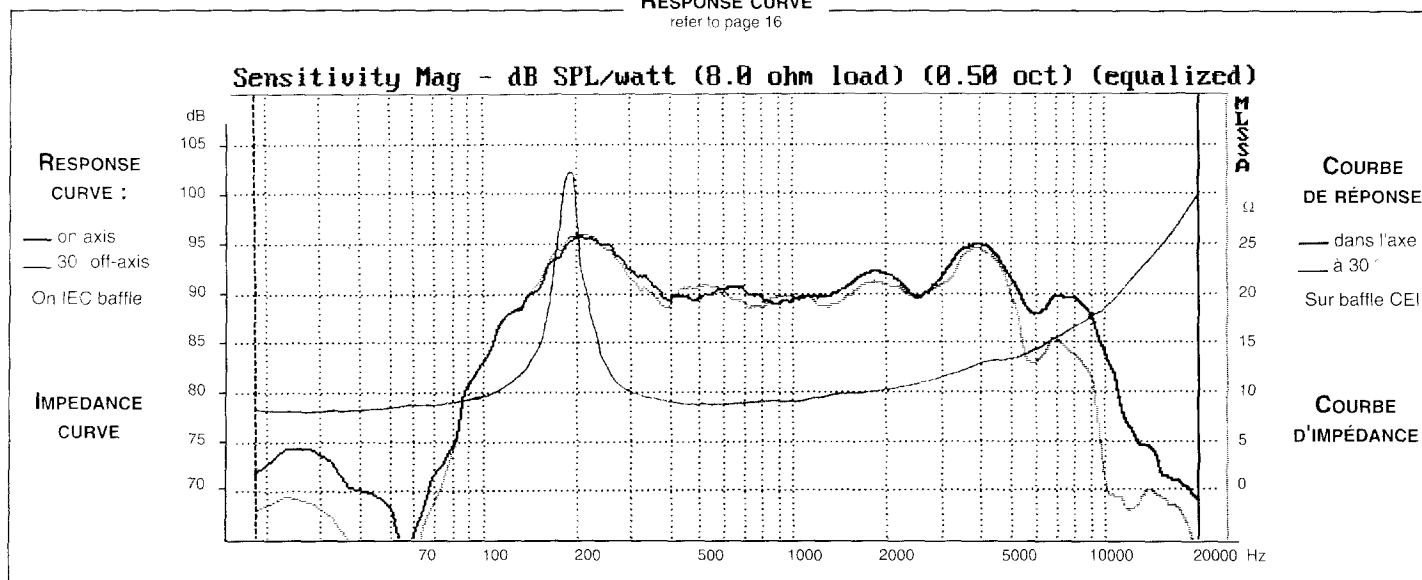

SPECIFICATIONS

Technical Characteristics	Symbol	Value	Units
PRIMARY APPLICATIONS			
Nominal Impedance	Z	8	Ω
Resonance Frequency	Fs	190	Hz
Nominal Power Handling	P	10	W
Sensitivity	E	90	dB
VOICE COIL			
Voice coil diameter	Ø	20	mm
Voice coil length	h	6	mm
DC Resistance	Re	6,8	Ω
Former	-	Aluminium	-
MAGNET			
Magnet dimensions	Ø x h	55 x 12	mm
Magnet weight	m	113.10 ⁻³	kg
Force factor	BL	3,31	NA
Linear excursion	Xmax	±1	mm
PARAMETERS			
Total Q Factor	Qts	1,34	-
Moving Mass	Mms	2,33.10 ⁻³	kg
Volume Eq. of Air at Cas	Vas	1,7.10 ⁻³	m ³
Mass of speaker	M	340.10 ⁻³	kg

This shallow stamped steel chassis (depth 42 mm) has been engineered for applications where limited space is available : Telecommunications - Public-address - electronics.

Ce haut-parleur de faible profondeur (42 mm) est conçu pour les nombreux usages (télécommunications, public-address, électronique ...) qui requièrent un encombrement limité.

