

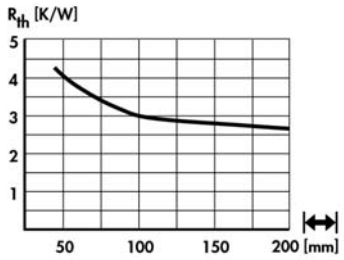


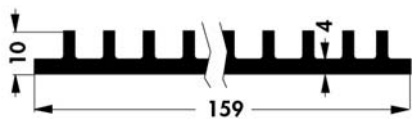
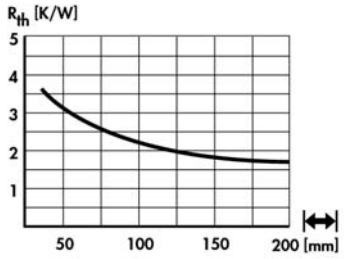



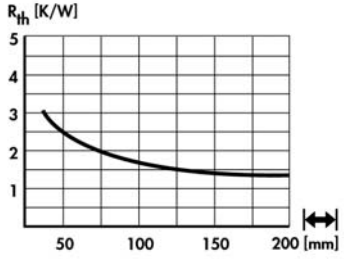



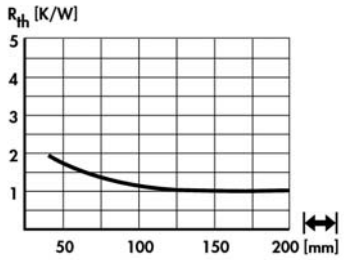



Extruded heatsinks for PCB mounting

Heatsinks for printed circuit boards

The heatsinks SK 414, SK 105, SK 44 and SK 415 are especially suitable for printed circuit board heatsinks for 19" plug in units.

art. no. SK 414 ...	 	
please indicate: ...  100 233.4 1000 mm		
art. no. SK 105 ...	 	
please indicate: ...  37.5 50 75 100 150 200 233.4 1000 mm		
art. no. SK 44 ...	 	
please indicate: ...  50 75 100 150 200 233.4 1000 mm		
art. no. SK 415 ...	 	
please indicate: ...  37.5 100 150 1000 mm		

Lock-in transistor fixing spring
Heatsink profile overview
Heatsinks for PCB
Heatsinks with threaded rail

→ A 117
→ A 13 - 16
→ A 89
→ A 92

Hole pattern
Profiles for lock-in fixing spring
Retaining springs for transistors
Thermal conductive material

→ A 21
→ A 85 - 88
→ A 114 - 119
→ E 2 - 15

A 90

A

B

C

D

E

F

G

H

I

K

L

M

N