



Syrex Shrieker XN

Voltage Range	Current	Ref No
24V DC	50mA	KN2446*
Audibility:	100 dB at 1m ± 3dB	
Frequency:	700/950Hz	
Flash Energy:	0.5 Joule (1Hz)	
Case:	High Impact ABS	
Weight:	0.21Kg	
Finish:	Red, White or Grey	
Lens Colour:	*Red, Amber, Clear or Blue (Add colour letter to Catalogue No.) Other colours available, quantities permitting	

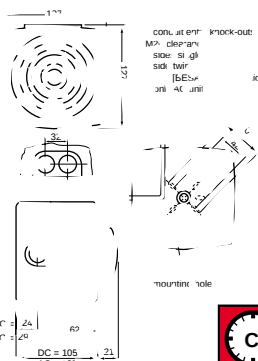


Syrex 5 XN

Voltage Range	Current	Ref No
12V DC	150mA	KN1980*
24V DC	100mA	KN1981*
110/230V AC	40/30mA	KN1982*
Audibility:	105 dB at 1m ± 3dB	
Frequency:	800/1000Hz	
Flash Energy:	1 Joule (1Hz)	
Case:	High Impact ABS	
Weight:	DC - 0.39Kg AC - 0.60Kg	
Finish:	Red	
Lens Colour:	*Red, Amber, Clear or Blue (Add colour letter to Catalogue No.) Other colours available, quantities permitting	

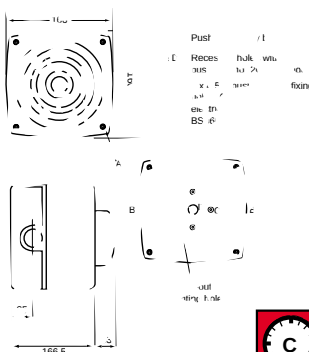

Syrex LC XN

Voltage Range	Current	Ref No
12V DC	150mA	KN1660*
24V DC	100mA	KN1661*
110/230V AC	40/30mA	KN1662*
Audibility:	110 dB at 1m ± 3dB	
Frequency:	800/1000Hz	
Flash Energy:	1 Joule (1Hz)	
Case:	High Impact ABS Flame Retardant	
Weight:	DC - 0.61Kg AC - 0.81Kg	
Finish:	Red	
Lens Colour:	*Red, Amber, Clear or Blue (Add colour letter to Catalogue No.) Other colours available, quantities permitting	

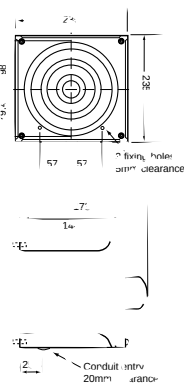

Syrex 9M XN

Voltage Range	Current	Ref No
12V DC	0.30A	KN1625*
24V DC	0.45A	KN1626*
110/230V AC	0.25/0.15A	KN1627/8*
Audibility:	118 -120 dB at 1m ± 3dB	
Frequency:	950/1200Hz	
Flash Energy:	1 Joule (1Hz)	
Case:	Aluminium Alloy LM 6M	
Weight:	6Kg	
Finish:	Red	
Lens Colour:	*Red, Amber, Clear or Blue (Add colour letter to Catalogue No.) Other colours available, quantities permitting	

