

LISA3-W-PIN

~35° wide beam with location pin installation


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 9.9 mm
Height	7 mm
Fastening	pin
Colour	black
Box size	310 x 230 x 60 mm
Box weight	1.3 kg
Quantity in Box	2000 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:



Component	Type	Material	Colour
LISA3-W	Single lens	PMMA	clear
LISA3-HLD-PIN	Holder	PC	black

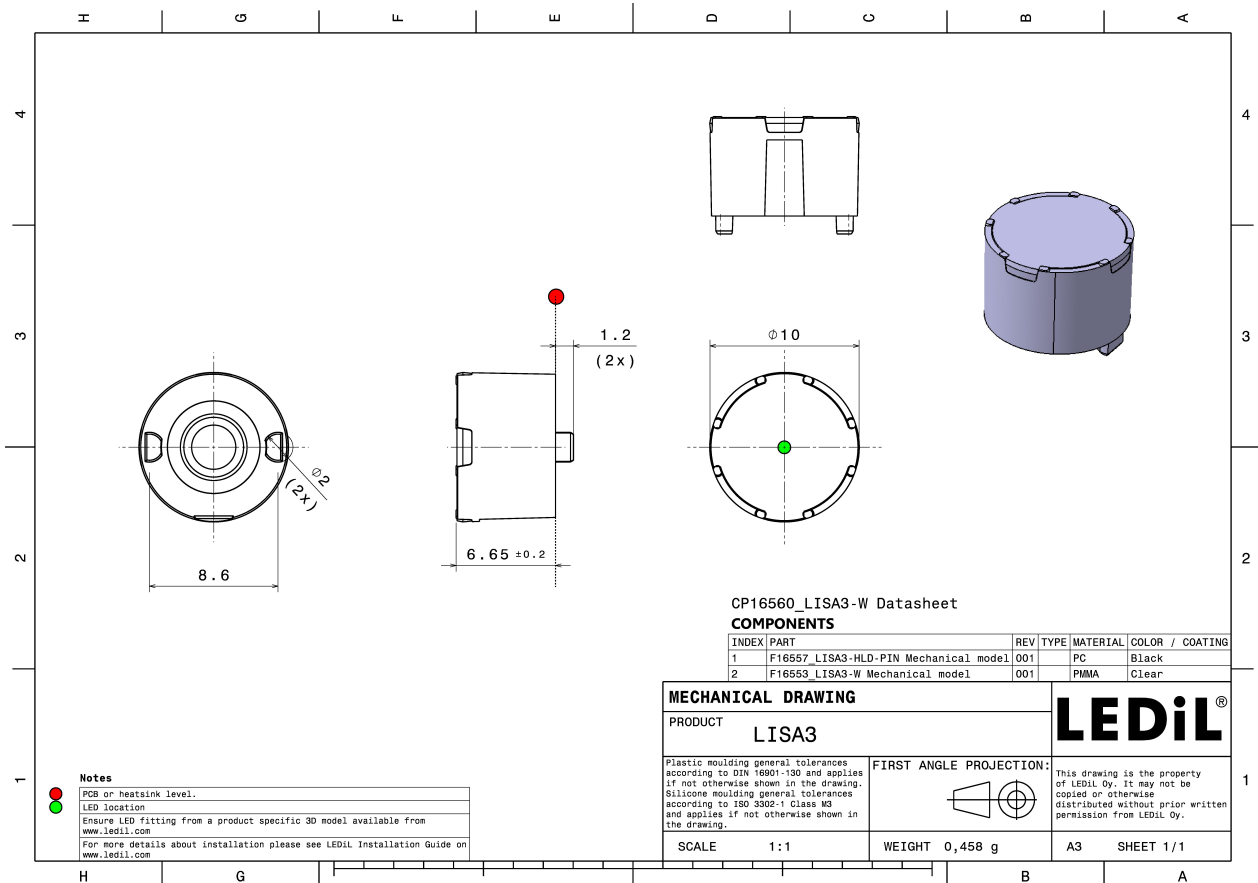

PHOTOMETRIC DATA (MEASURED):




LED NF2x757G
FWHM 32.0°
Efficiency 79 %
Peak intensity 2.200 cd/lm
LEDs/each optic 1
Light colour White
Required components:

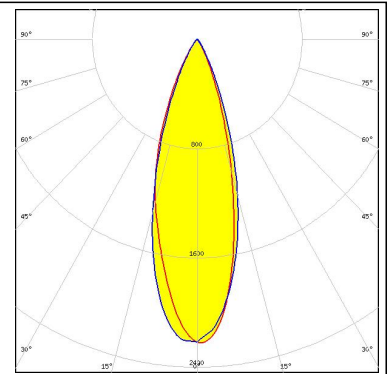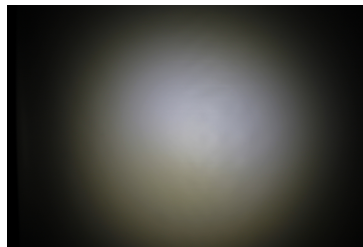


PHOTOMETRIC DATA (SIMULATED):




LED XP-E
FWHM 41.0°
Efficiency 92 %
Peak intensity 2.060 cd/lm
LEDs/each optic 1
Light colour White
Required components:

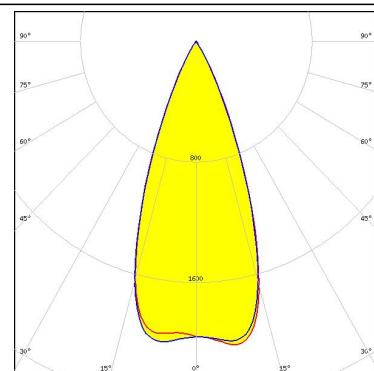


LED XP-E2
FWHM 35.0°
Efficiency 90 %
Peak intensity 2.700 cd/lm
LEDs/each optic 1
Light colour White
Required components:

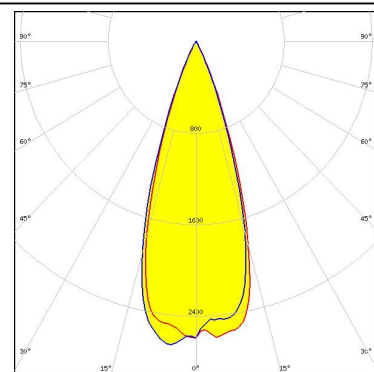

LED XP-G3
FWHM 38.0°
Efficiency 85 %
Peak intensity 1.800 cd/lm
LEDs/each optic 1
Light colour White
Required components:

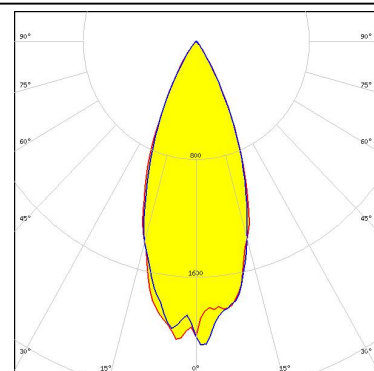


LED XT-E
FWHM 30.0°
Efficiency 82 %
Peak intensity 2.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

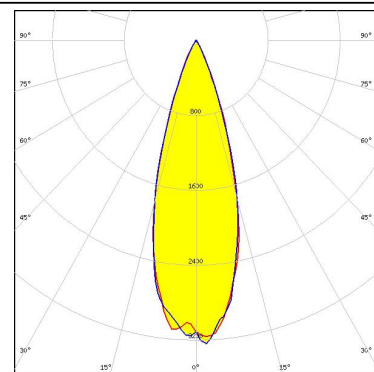


PHOTOMETRIC DATA (SIMULATED):




LED LUXEON 3030 2D (Round LES)
FWHM 30.0°
Efficiency 85 %
Peak intensity 3.180 cd/lm
LEDs/each optic 1
Light colour White
Required components:

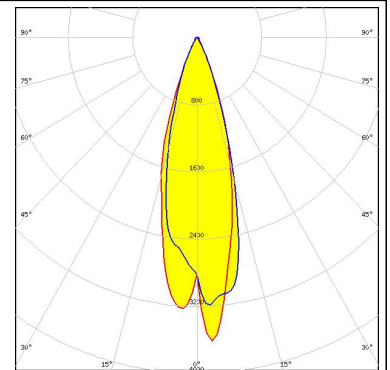


LED LUXEON TX
FWHM 36.0°
Efficiency 87 %
Peak intensity 2.250 cd/lm
LEDs/each optic 1
Light colour White
Required components:

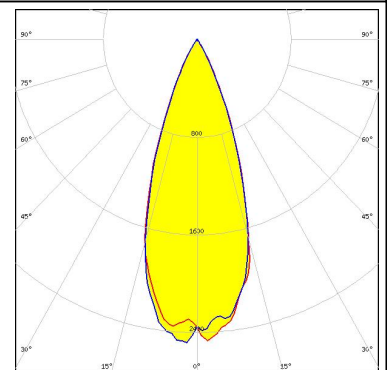

LED LUXEON V2
FWHM 36.0°
Efficiency 90 %
Peak intensity 2.150 cd/lm
LEDs/each optic 1
Light colour White
Required components:

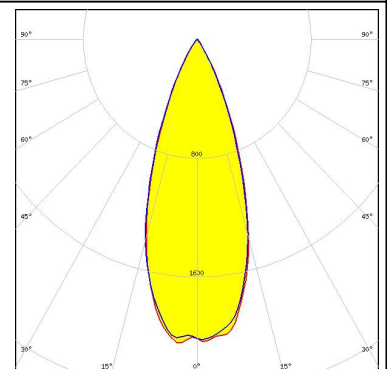


LED LUXEON Z
FWHM 27.5°
Efficiency 88 %
Peak intensity 4.220 cd/lm
LEDs/each optic 1
Light colour White
Required components:

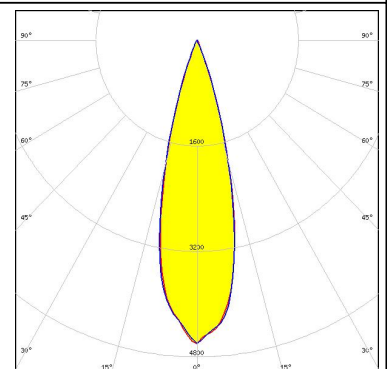


PHOTOMETRIC DATA (SIMULATED):




LED NVSxx19B/NVSxx19C
 FWHM 38.9°
 Efficiency 83 %
 Peak intensity 1.810 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

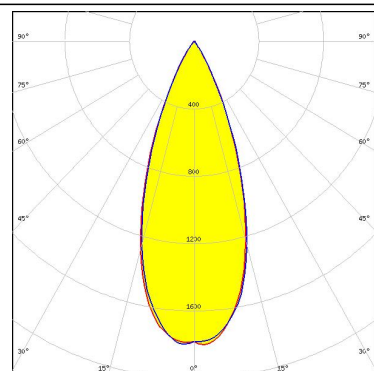


LED Duris S5 (2 chip)
 FWHM 30.0°
 Efficiency 87 %
 Peak intensity 2.920 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

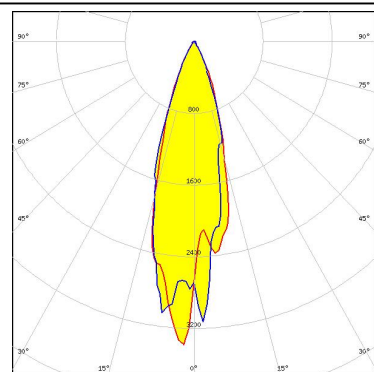

LED Duris S5 (Single chip)
 FWHM 30.0°
 Efficiency 86 %
 Peak intensity 3.200 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

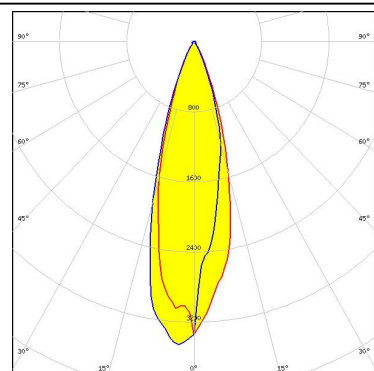

LED OSCONIQ P 3030
 FWHM 29.0°
 Efficiency 87 %
 Peak intensity 3.374 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

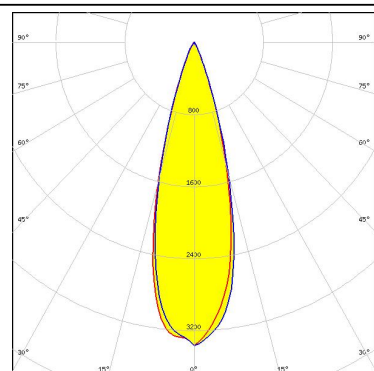


PHOTOMETRIC DATA (SIMULATED):

OSRAM

Opto Semiconductors


LED OSLON Square CSSRM2/CSSRM3
FWHM 34.0°
Efficiency 88 %
Peak intensity 2.490 cd/lm
LEDs/each optic 1
Light colour White
Required components:

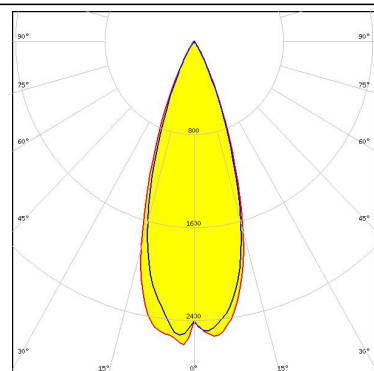

OSRAM

Opto Semiconductors


LED OSLON Square EC
FWHM 35.0°
Efficiency 88 %
Peak intensity 2.400 cd/lm
LEDs/each optic 1
Light colour White
Required components:

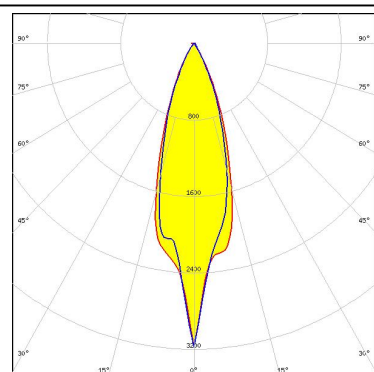

OSRAM


Opto Semiconductors

LED OSLON SSL 150
FWHM 35.0°
Efficiency 90 %
Peak intensity 2.580 cd/lm
LEDs/each optic 1
Light colour White
Required components:

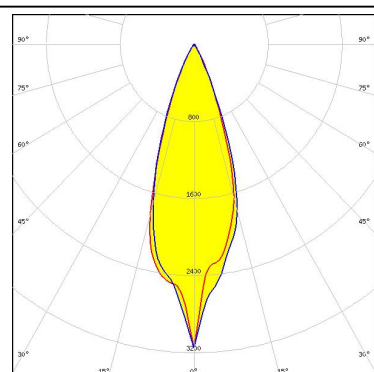

SAMSUNG


LED LH351C
FWHM 38.0°
Efficiency 86 %
Peak intensity 1.900 cd/lm
LEDs/each optic 1
Light colour White
Required components:

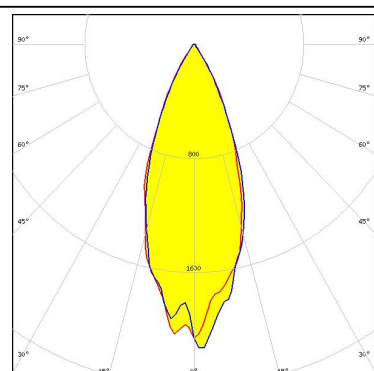

PHOTOMETRIC DATA (SIMULATED):


SAMSUNG

LED LH351D
FWHM 41.0°
Efficiency 85 %
Peak intensity 1.500 cd/lm
LEDs/each optic 1
Light colour White
Required components:

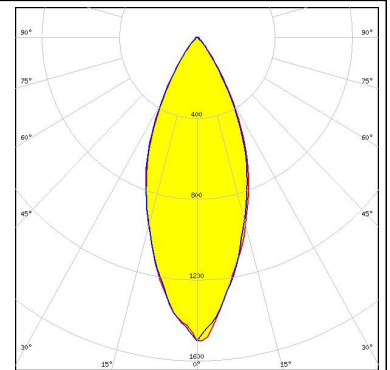


SAMSUNG

LED LM301A
FWHM 29.0°
Efficiency 87 %
Peak intensity 3.470 cd/lm
LEDs/each optic 1
Light colour White
Required components:

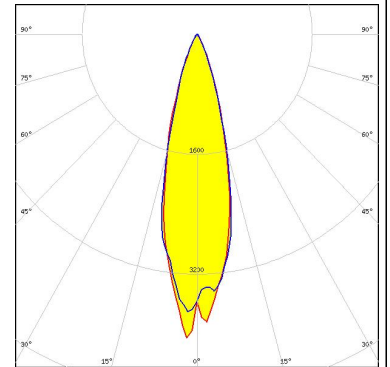

SAMSUNG

LED LM302A
FWHM 30.0°
Efficiency 87 %
Peak intensity 3.070 cd/lm
LEDs/each optic 1
Light colour White
Required components:

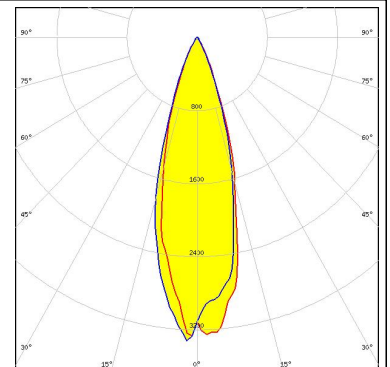

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)