

FEATURES

- Quick and easy installation
- Available in red or amber
- Suitable for a range of signalling applications
- Powerful flashing signal light
- Ideal for use both indoors and outdoors

RS PRO Amber Xenon Beacon, 10 → 100 V dc, 20 → 72 V ac, Flashing, Surface Mount, Wall Mount

RS Stock No.: 187-9643



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

Introducing industrial Xenon beacons from RS PRO, a range of high quality flashing beacons ideal for use in a wide range of security and process control applications requiring a low cost and energy efficient signalling solution. This range of durable flashing beacons are available in red and amber, with varying voltages and current draws to suit your needs. The units are supplied fully assembled to enable quick and easy installation via a 2 stud fix mount. The simple design allows you to install the Xenon beacons to a wall or similar surface with ease. This range of flashing beacons from RS PRO are suitable for light and heavy industrial signalling applications, producing a powerful flashing light source to signal hazards and emergencies.

What colours are available?

This range of Xenon beacons from RS PRO are available in the following colours and voltages:

[1879643](#) (Amber) 10-100vDC & 20-72vAC (Voltage) 130mA* (Current Draw)

[1879642](#) (Red) 10-100vDC & 20-72vAC (Voltage) 130mA* (Current Draw)

[1879645](#) (Amber) 115vAC (Voltage) 30mA (Current Draw)

[1879644](#) (Red) 115vAC (Voltage) 30mA (Current Draw)

[1879647](#) (Amber) 230vAC (Voltage) 21mA (Current Draw)

[1879646](#) (Red) 230vAC (Voltage) 21mA (Current Draw).

General Specifications

Bulb Type	Xenon
Light Effect	Flashing
Lens Colour	Amber
Fitting	2M4screws
Magnetic type	No
Housing Colour	Black
Lamp Include	Yes
Multifunction	No
Number of LED	1

Electrical Specifications

Supply Voltage	230 VAC
Current Type	AC
Current Consumption	130mA

Mechanical Specifications

Dimensions	107mm (h)
Base Diameter	72mm
Mounting Style	Surface Mount ,Wall Mount

Operation Environment Specifications


Maximum Temperature	-20°C
Minimum Temperature	+55°C

Approvals

Standards Met	RoHS Compliant
----------------------	----------------



Image 1

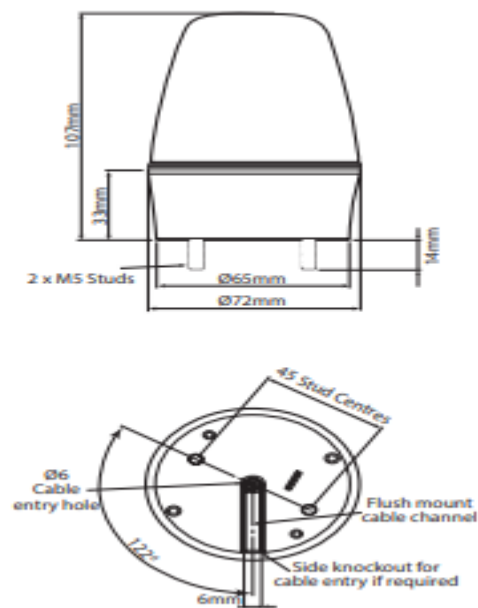

S00619