


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0901230102
Status: Active
Overview: C-Grid III Interconnects
Description: 2.54mm Pitch C-Grid III Modular Crimp Housing Single Row, 2 Polarizing Buttons, 2 Circuits, Black

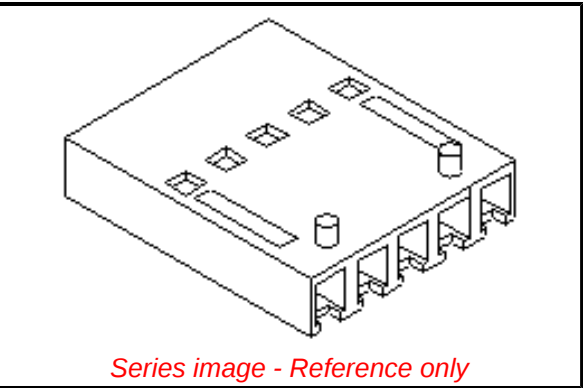

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-99020-0001-001 \(PDF\)](#)
[Packaging Specification PK-90123-0001 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification
UL E29179

General
Product Family Crimp Housings
Series 90123
Application Signal, Wire-to-Board
Comments 2 Polarizing Buttons, 2 Polarizing Buttons
Overview C-Grid III Interconnects
Product Name C-Grid III
UPC 800753707351

Physical
Circuits (maximum) 2
Color - Resin Black
Flammability 94V-1
Gender Receptacle
Glow-Wire Capable No
Material - Resin PPO
Net Weight 0.113/g
Number of Rows 1
Packaging Type Bag
Panel Mount No
Pitch - Mating Interface 2.54mm
Stackable Yes
Temperature Range - Operating -55° to +105°C

Solder Process Data
Duration at Max. Process Temperature (seconds) 002
Lead-freeProcess Capability N/A
Max. Cycles at Max. Process Temperature 001
Process Temperature max. C 120

Material Info

Reference - Drawing Numbers
Packaging Specification PK-90123-0001
Product Specification PS-99020-0001-001
Sales Drawing SD-90123-001

EU ELV
Not Relevant

EU RoHS **China RoHS**
Compliant
REACH SVHC
Not Contained Per
-ED/88/2018 (15
January 2019)
Halogen-Free
Status
Low-Halogen
For more information, please visit [Contact US](#)

China ROHS Green Image
ELV Not Relevant
RoHS Phthalates Not Contained

Search Parts in this Series
90123 Series

Mates With
C-Grid III Header 90120 , 90121 , C-Grid III Header 90136

Use With
C-Grid III Crimp Terminal 90119

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION